

PART NUMBER

KPD177260

REV.

DATE

COMMENTS

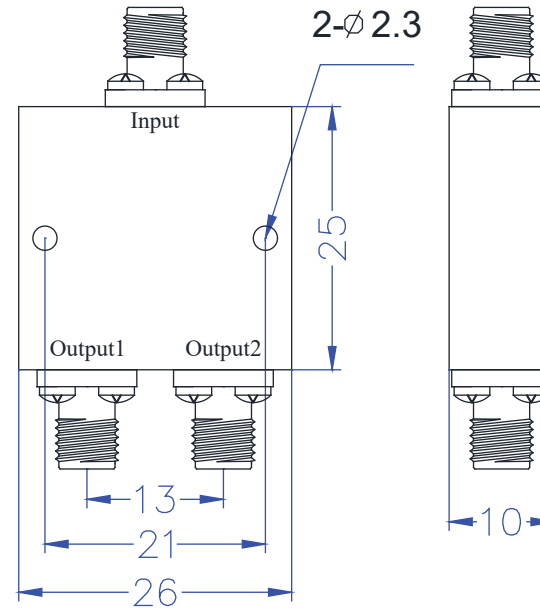
INITIAL

Electrical Data

Impedance	50 Ω
Frequency Range	6,000-4,0000MHz
Insertion loss	≤ 1.5 dB
VSWR	≤ 1.80 (Input) ≤ 1.60 (Output)
Amplitude Balance	$\leq \pm 0.40$ dB
Phase Balance	$\leq \pm 5$ degree
Isolation	≥ 16 dB
Forward Power	10W

Mechanical Data

Operational Temperature	-40 to +80°C
Storage Temperature	-45 to +85°C

RoHS Compliant

Drawing not to scale. Dimensions for reference only

Units: mm (± 0.3 mm)**Konnect RF**

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KPD177260

DESCRIPTION

Power Divider, 2 Way, 2.92 Female Jack

CAGE CODE

664U0

SIGNATURE

X

Component
Body

Material

Plating
Grey Paint

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.