

PART NUMBER

KPD177272

REV.

DATE

COMMENTS

INITIAL


Electrical Data

Impedance	50 Ω
Frequency Range	0.5 - 8 GHz
Insertion Loss	≤ 1.50 dB
Amplitude Balance	$\leq \pm 0.3$ dB
Phase Balance	$\leq \pm 3$ degree
Isolation	≥ 20 dB
Average Power	30W (Forward) 2W (Reverse)
VSWR	≤ 1.50 (Input) ≤ 1.30 (Output)

Mechanical Data

Operational Temp.	-40 $^{\circ}$ C - 80 $^{\circ}$ C
Storage Temp.	-45 $^{\circ}$ C - 85 $^{\circ}$ C

RoHS Compliant

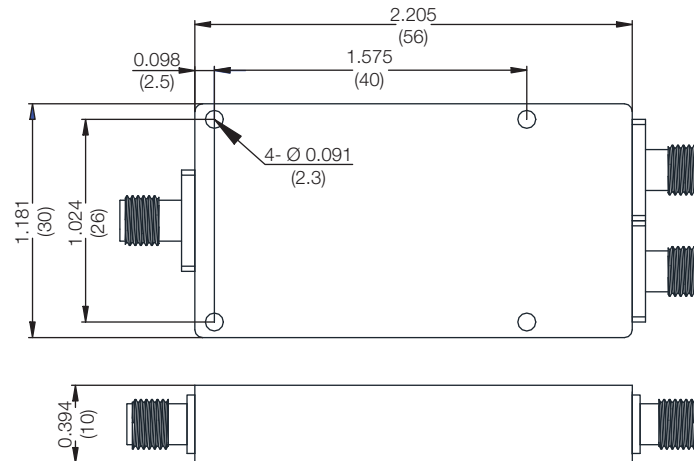

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KPD177272

DESCRIPTION

Power Divider, 2 Way , SMA Female

CAGE CODE

664U0

SIGNATURE

X

Component
Body

Finish
Grey Painting

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.