

PART NUMBER

KPD177280

REV.

DATE

COMMENTS

INITIAL

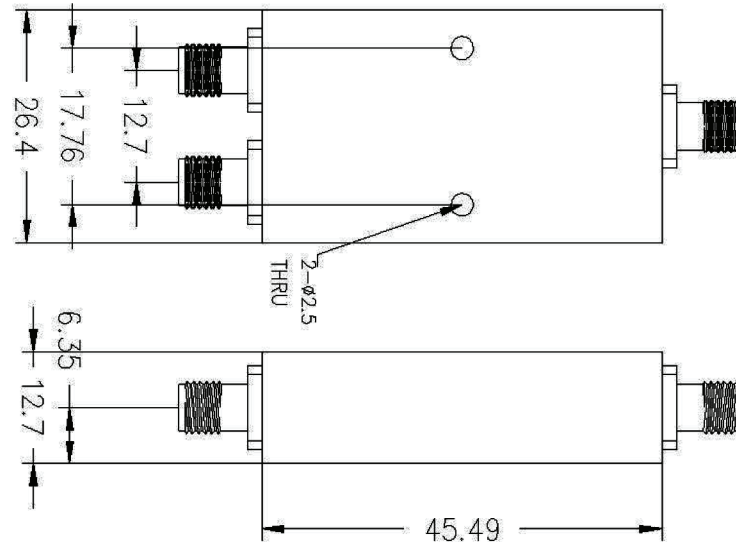
Electrical Data

Impedance	50 Ω
Frequency Range	2 - 40 GHz.
Insertion Loss	≤ 1.8 dB
Isolation	≥ 15 dB
Amplitude Balance	≤ 0.4 dB
Phase Balance	$\leq 4^\circ$
Power Rating as Divider	30 Watts
Power Rating as Combiner	3 Watts
VSWR	≤ 1.60

RoHS Compliant

Mechanical Data

Temperature Range: -45 °C - 85 °C

**Drawing not to scale. Dimensions for reference only****Units: inches (mm)****Konnnect RF**

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KPD177280

DESCRIPTION

Power Divider, 2 Way, 2.92 Female Jack

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.

Component

Housing
 Connector
 Female Contact

Material

Aluminum
 Stainless Steel
 BeCu

Plating

Passivated
 Gold