

PART NUMBER

KPD177322

REV.

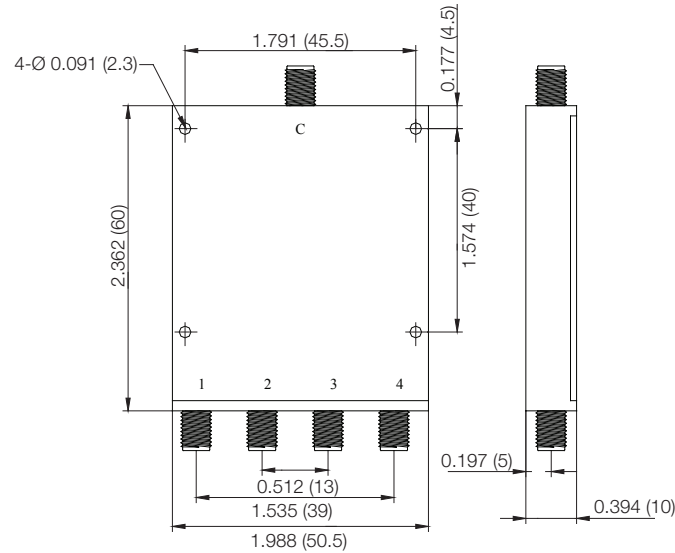
DATE

COMMENTS

INITIAL

Electrical Data

Impedance	50 Ω
Frequency Range	10 - 20 GHz.
Insertion Loss	\leq 1.2 dB
Forward Power	10 Watts
Reverse Power	1 Watt
Isolation	20 dB Max.
Phase Balance	\pm 8° Max.
Amplitude Balance	\pm 0.5 dB Max.
Input VSWR	\leq 1.6
Output VSWR	\leq 1.5

RoHS Compliant**Mechanical Data**

Temperature Range: -40 °C - 70 °C

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

Konnnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KPD177322

DESCRIPTION

Power Divider, 4 Way, SMA Female Jack

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.