

PART NUMBER

**KPD177327**

REV.

DATE

COMMENTS

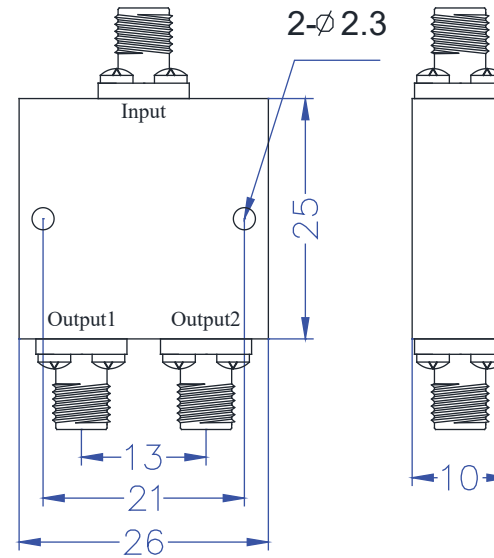
INITIAL

**Electrical Data**

Impedance	50 $\Omega$
Frequency Range	18,000-40,000MHz
Insertion loss	$\leq 1.5$ dB
VSWR	$\leq 1.80$ (Input) $\leq 1.60$ (Output)
Amplitude Balance	$\leq \pm 0.40$ dB
Phase Balance	$\leq \pm 5$ degree
Isolation	$\geq 16$ dB
Average Power	5W ( Forward )

**Mechanical Data**

Operational Temperature	-40 to +80 $^{\circ}\text{C}$
Storage Temperature	-45 to +85 $^{\circ}\text{C}$

**RoHS Compliant**

Drawing not to scale. Dimensions for reference only

Units: mm ( $\pm 0.3$ mm)**Konnect RF**

WWW.KONNECTRF.COM  
1-800-790-5887

PART NUMBER

**KPD177327**

DESCRIPTION

**Power Divider, 2 Way, 2.92 Female Jack**

CAGE CODE

**664U0**

SIGNATURE

X

**Component**  
Body

**Material**

**Plating**  
Grey Paint

THIS DRAWING INCLUDING THE  
DESIGNS IS THE PROPERTY OF  
KONNECT RF AND IS NOT TO  
BE USED FOR ANY PURPOSE  
WITHOUT OUR APPROVAL.