

PART NUMBER

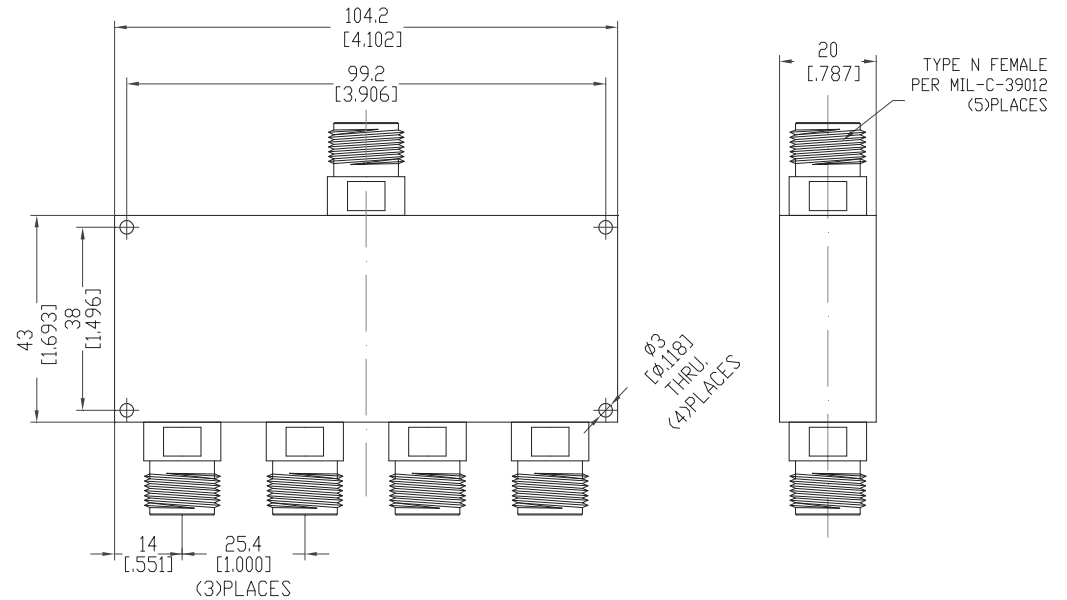
**KPD177352**

REV.

INITIAL

**Electrical Data**

Impedance	50 $\Omega$
Frequency Range	3 - 7 MHz
Insertion Loss	$\leq 1.0$ dB
VSWR	$\leq 1.4:1$
Isolation	$\geq 17$ dB
Amplitude Balance	$\leq \pm 0.5$ dB
Phase Balance	$\leq \pm 5^\circ$
Operating Temperature	$-40^\circ\text{C} \sim +85^\circ\text{C}$
Power Handling	Forward $\leq 20$ W Reversed $\leq 1$ W

**RoHS Compliant**

**VSWR and Frequency Range Specifications**  
are for reference and are dependant on cable  
type and other application specific conditions

Drawing not to scale. Dimensions for reference only

Units: mm (inches)

WWW.KONNECTRF.COM  
1-800-790-5887

PART NUMBER

**KPD177352**

DESCRIPTION

**Power Divider, 4 Way, N Female Jack**

CAGE CODE

**664U0**

SIGNATURE

X

THIS DRAWING INCLUDING THE  
DESIGNS IS THE PROPERTY OF  
KONNECT RF AND IS NOT TO  
BE USED FOR ANY PURPOSE  
WITHOUT OUR APPROVAL.