

PART NUMBER

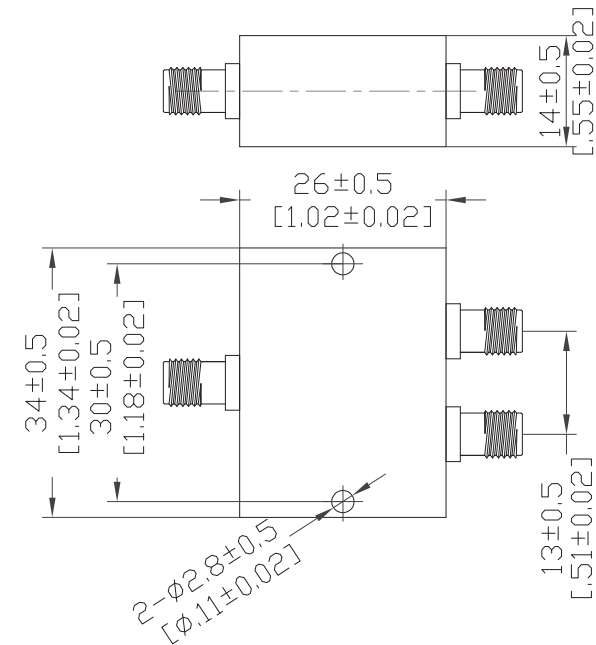
KPD177366

REV.

INITIAL

Electrical Data

Impedance	50 Ω
Frequency Range	2 - 4 GHz
Insertion Loss	≤ 0.4 dB
Amplitude Balance	≤ 0.2 dB
VSWR	$\leq 1.3:1$
Isolation	≥ 20 dB
Power Handling	20 Watt
Operating Temperature	-30°C to + 70°C

RoHS Compliant

Drawing not to scale. Dimensions for reference only

Units: mm (inches)

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KPD177366

DESCRIPTION

Power Divider, 2 Way, SMA Female

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.