

PART NUMBER

KPD177380

REV.

DATE

COMMENTS


INITIAL

Electrical Data

Impedance	50 Ω
Frequency Range	1.0 - 2.0 GHz.
Split Loss	7 dB
Power Handling	10 Watts as a Divider 2 Watts as a Combiner
Insertion Loss	0.8 dB Max
Isolation	15 dB min
Dimension Tolerance	± 0.5 mm
VSWR	1.50 Max

RoHS Compliant**Mechanical Data**

Temperature Range: -40 °C - 85 °C

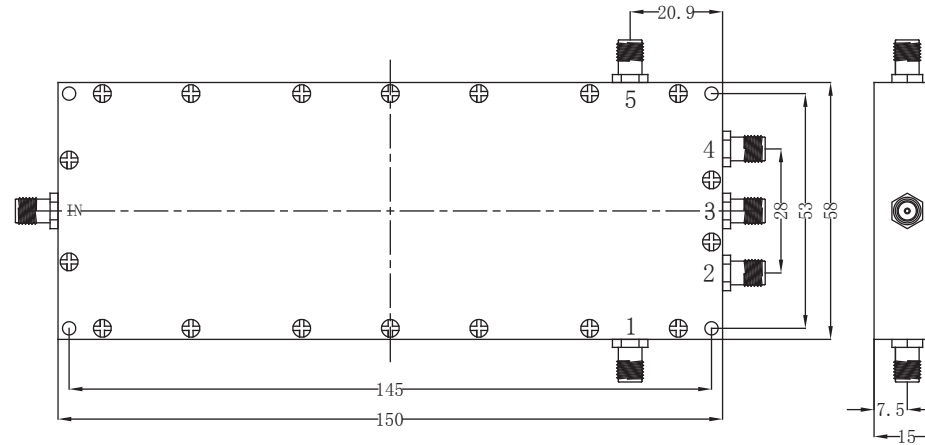

Drawing not to scale. Dimensions for reference only

Units: mm

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KPD177380

DESCRIPTION

Power Divider/Combiner, 5 Way, SMA Female Jack

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.