

PART NUMBER

**KPD177550**

REV.

INITIAL

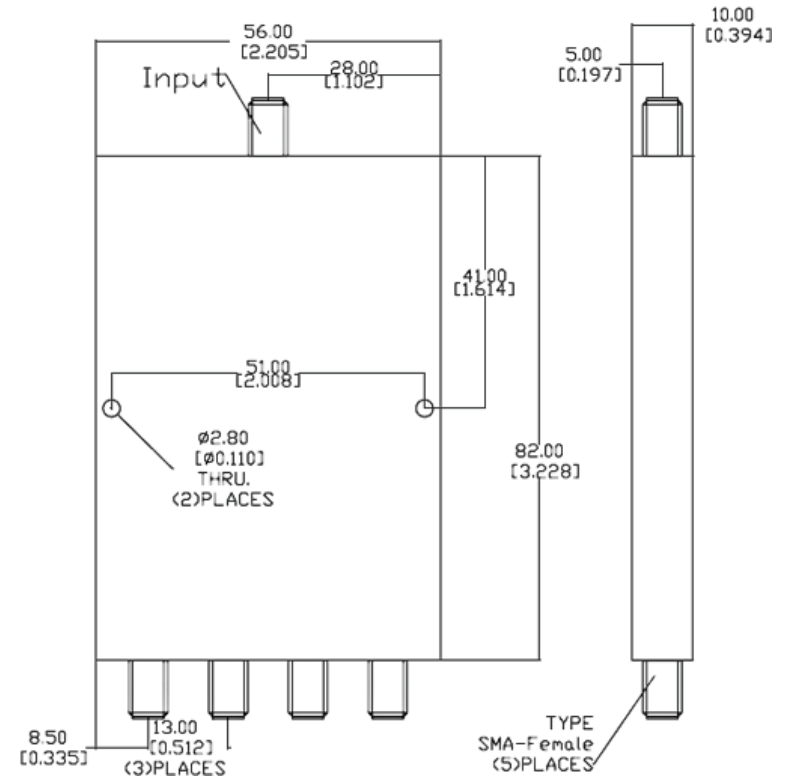
**Electrical Data**

|                   |                |
|-------------------|----------------|
| Impedance         | 50 $\Omega$    |
| Frequency Range   | 2 - 18 GHz     |
| Isolation         | 15 dB          |
| Insertion Loss    | 2.6 dB         |
| Amplitude Balance | 0.6 dB         |
| Phase Balance     | 6 degrees Max. |
| VSWR              | 1.80:1 Max.    |
| Input Power       | 20 Watt Avg    |

Interface Dimensions per MIL STD-348

VSWR and Frequency Range Specifications are for reference and are dependant on cable type and other application specific conditions

Drawing not to scale. Dimensions for reference only

**RoHS Compliant****Konnnect RF**

540 NW University Blvd. Ste. 109  
Port Saint Lucie, Florida, 34986  
1-800-790-5887

PART NUMBER

**KPD177550**

DESCRIPTION

**Power Divider - 4-Way - SMA Female**

CAGE CODE

**664U0**

SIGNATURE

X

**Finish: Painted**

THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.