

PART NUMBER

KPD177555

REV.

Frequency Range: 2000-18000 MHz

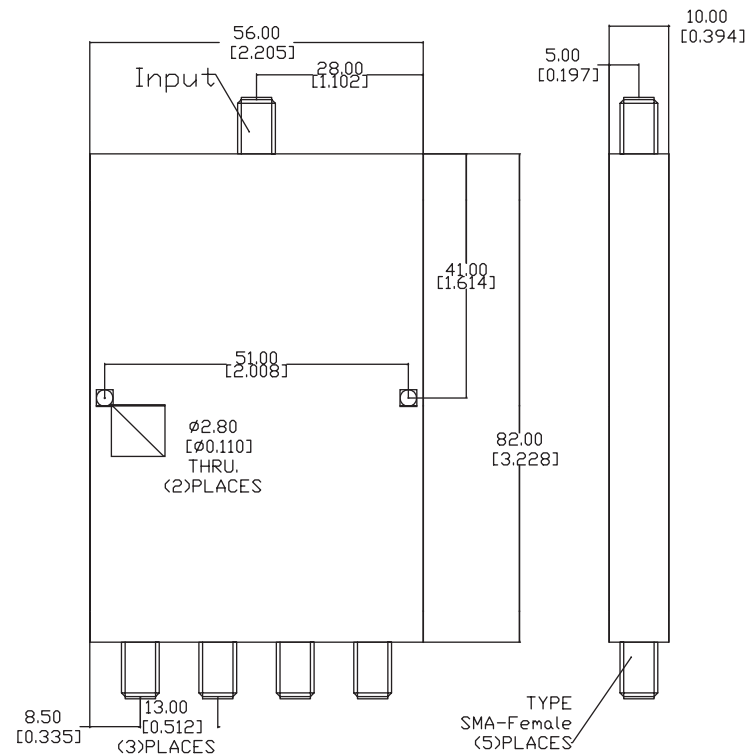
Insertion Loss: ≤ 2.6 dBAmplitude Balance: ≤ 0.6 dBPhase Balance: $\pm 6^\circ$ VSWR: $\leq 1.80:1$ Isolation: ≥ 15 dB

Impedance: 50 Ohms

Power Handling: 20 Watts (Forward)
2 Watts (Reverse)Operation Temperature: -55°C to $+85^\circ\text{C}$

Connectors: SMA Female

Finish: Black

**Konnnect RF**

WWW.KONNECTRF.COM
 540 NW University Blvd. Ste. 109
 Port Saint Lucie, Florida, 34986
 1-800-790-5887

PART NUMBER

KPD177555DESCRIPTION **2 - 18 GHz 4-WAY SMA POWER DIVIDER**

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.