

PART NUMBER

**KPD177588**

REV.

INITIAL


**Electrical Data**

Impedance	50 $\Omega$
Frequency Range	0.8 - 2.0 GHz
Isolation	25 dB Typical 20 dB Min.
Insertion Loss	0.6 dB Nominal @ 2200 MHz
Amplitude Tracking	$\pm 0.5$ dB Max.
VSWR	1.50:1 Max.
Power Input	5 Watts Average @ common port 1.6 Watts as a combiner
Operating Temperature Range	-55°C to + 85°C

**RoHS Compliant**

VSWR and Frequency Range Specifications are for reference and are dependant on cable type and other application specific conditions

Drawing not to scale. Dimensions for reference only

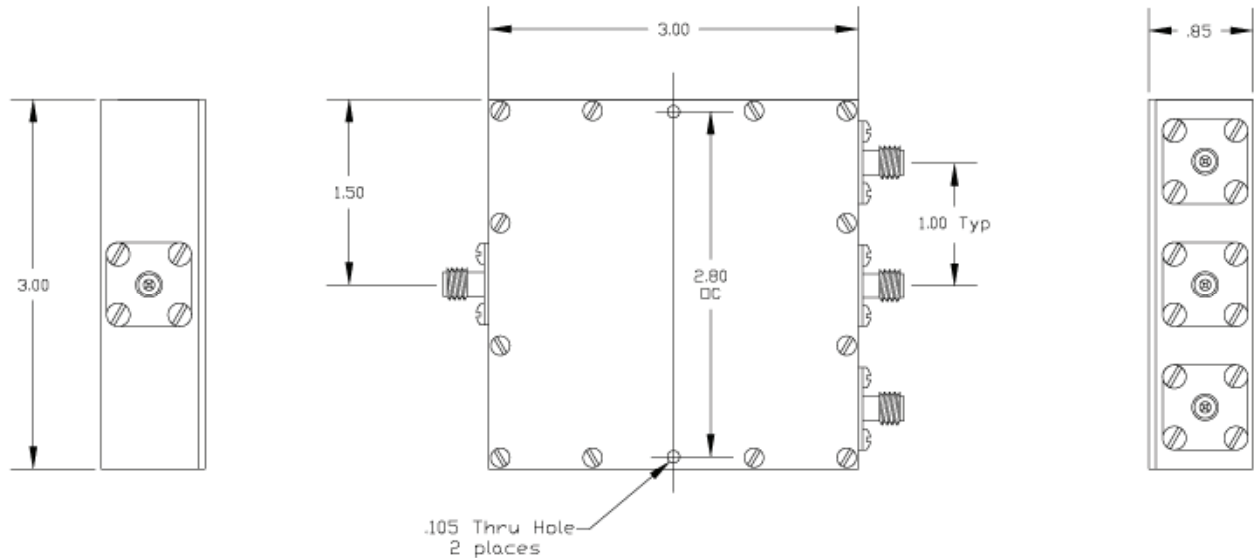

WWW.KONNECTRF.COM  
540 NW University Blvd. Ste. 109  
Port Saint Lucie, Florida, 34986  
1-800-790-5887

PART NUMBER

**KPD177588**

DESCRIPTION

**Power Divider/Combiner - 3 Way - SMA Female**

CAGE CODE

**664U0**

SIGNATURE

X

THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.