

PART NUMBER

**KPD177597**

REV.

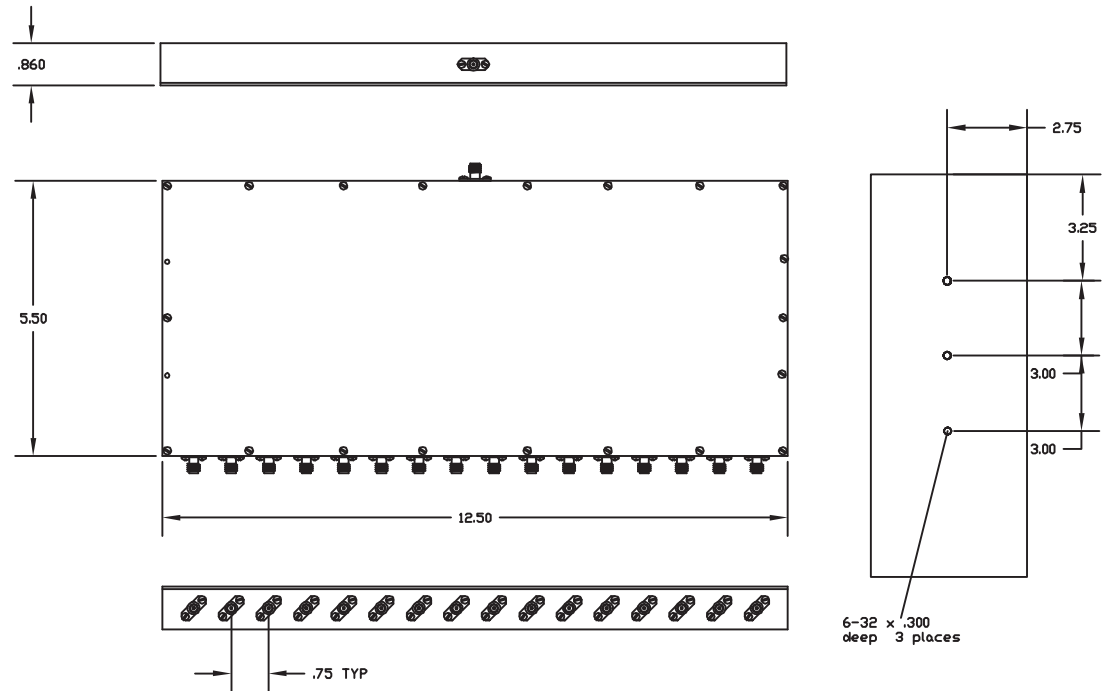
INITIAL

**Electrical Data**

Impedance 50  $\Omega$   
 Frequency Range 0.8 - 2.5 GHz.  
 Isolation 25 dB typical  
 20 dB minimum  
 Insertion Loss  $\leq 1.7$  dB nominal @ 2.5 GHz  
 Amplitude Tracking  $\pm 0.5$  dB max.  
 Power Input 5 Watts Average @ Common Port  
 VSWR  $\leq 1.60$

**Mechanical Data**

Temperature Range: -55  $^{\circ}\text{C}$  - 85  $^{\circ}\text{C}$

**RoHS Compliant**

Drawing not to scale. Dimensions for reference only

Units: Inches

**Konnect RF**

WWW.KONNECTRF.COM  
 1-800-790-5887

PART NUMBER

**KPD177597**

DESCRIPTION

**Power Divder, 16 Way, SMA Female, 5 Watts**

CAGE CODE

**664U0**

SIGNATURE

X

THIS DRAWING INCLUDING THE  
 DESIGNS IS THE PROPERTY OF  
 KONNECT RF AND IS NOT TO  
 BE USED FOR ANY PURPOSE  
 WITHOUT OUR APPROVAL.