

PART NUMBER

KPD177643

REV.

DATE

COMMENTS

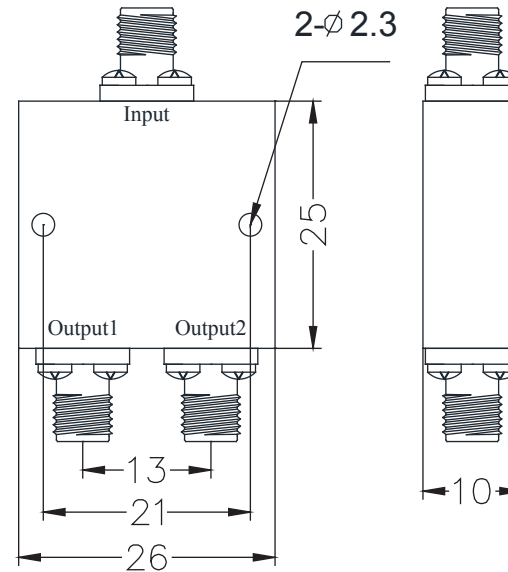
INITIAL

Electrical Data

Impedance	50 Ω
Frequency Range	26 - 31 GHz.
Insertion Loss	≤ 1.5 dB
Return Loss	≥ 15 dB
Amplitude Balance	$\leq \pm 0.40$ dB
Phase Balance	$\leq \pm 5$ degree
Isolation	≥ 20 dB
Average Power	5 W (Forward)

Mechanical Data

Operational Temperature :	-40 $^{\circ}$ C - 80 $^{\circ}$ C
Storage Temperature	-45 $^{\circ}$ C - 85 $^{\circ}$ C

RoHS Compliant

Drawing not to scale. Dimensions for reference only

Units: mm

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KPD177643

DESCRIPTION

Power Divider, 2 Way, 2.92 Female

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.