

PART NUMBER  
**KPD177698**

REV.	DATE	COMMENTS	INITIAL


RoHS Compliant

**Electrical Data**

Impedance 50 Ω  
 Frequency Range 0.5 - 6 GHz.  
 Insertion Loss ≤ 3.2 dB  
 VSWR  
 Input ≤ 1.80  
 Output ≤ 1.60  
 Amplitude Balance ≤ ±0.6dB  
 Phase Balance ≤ ±6 Degrees  
 Isolation ≥ 16dB  
 Average Power  
 Forward 20W  
 Reverse 2W

**Mechanical Data**

Operational Temperature Range: -40 °C - 80 °C  
 Storage Temperature Range: -45 °C - 85 °C

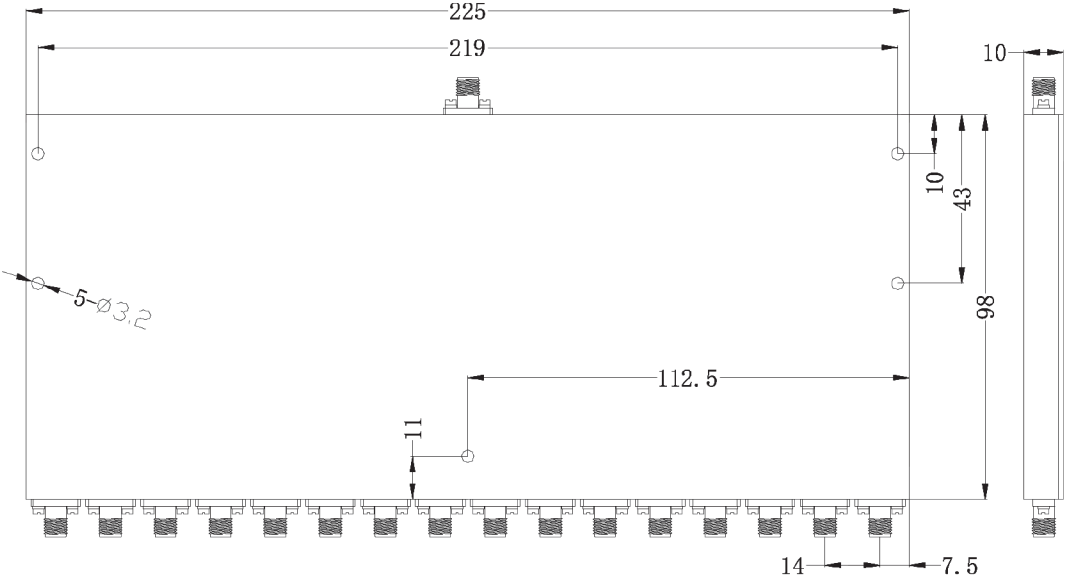

Drawing not to scale. Dimensions for reference only Units: (mm)



WWW.KONNECTRF.COM  
1-800-790-5887

PART NUMBER  
**KPD177698**

CAGE CODE  
**664U0**

SIGNATURE  
*[Signature]*  
**X**

DESCRIPTION  
**Power Divider, 16 Way, SMA Female ,0.5-6 GHz, 20 Watts (Forward)**

Component Body  
Surface Finishing Grey Painting

THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.