

PART NUMBER

KPD177801

REV.

DATE

COMMENTS

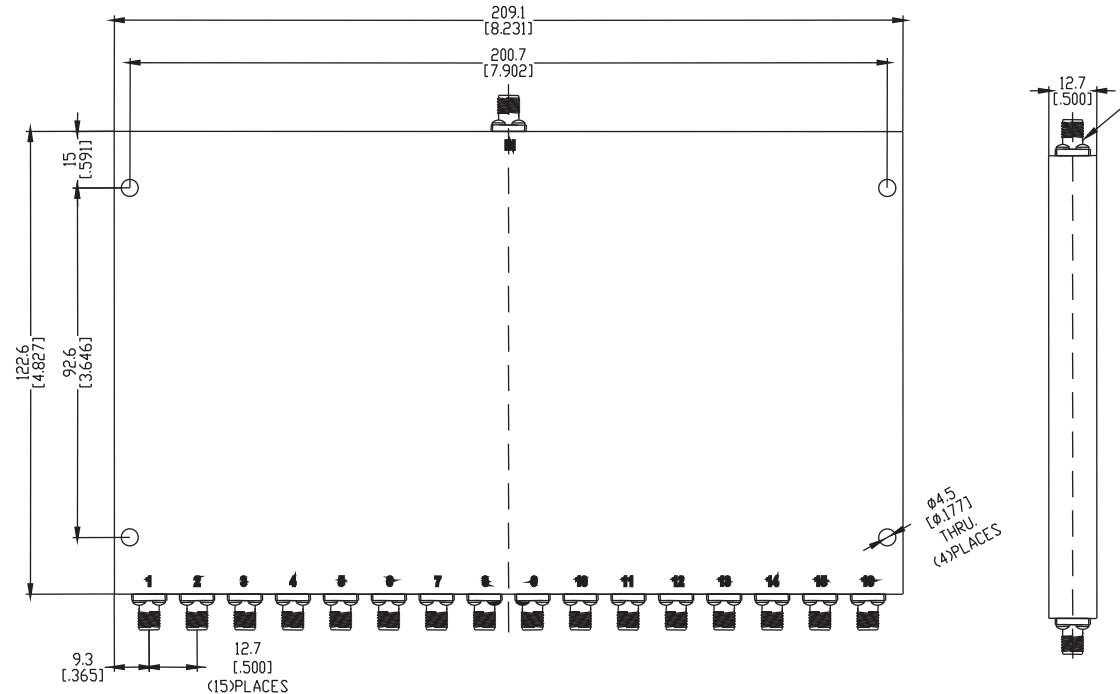
INITIAL

Electrical Data

Input & Output Impedance	50 Ω
Frequency Range	2-18 GHz.
Amplitude Unbalance	1.0 dB max
Phase Unbalance	+/- 8° max
Insertion Loss	3.5 dB max
Isolation	16dB min
Power	30W Forward 0.25W reverse
VSWR	1.8 max

Mechanical Data

Temperature Range: -35°C - 85 °C

RoHS Compliant

Drawing not to scale. Dimensions for reference only

Units: mm (Inches)

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KPD177801

DESCRIPTION

Power Divider, 16 Way, SMA Female

CAGE CODE

664U0

SIGNATURE

X

Component
Body

Material
Aluminum Alloy

Plating
Black Paint

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.