

PART NUMBER

KPD177912

REV.

DATE

COMMENTS

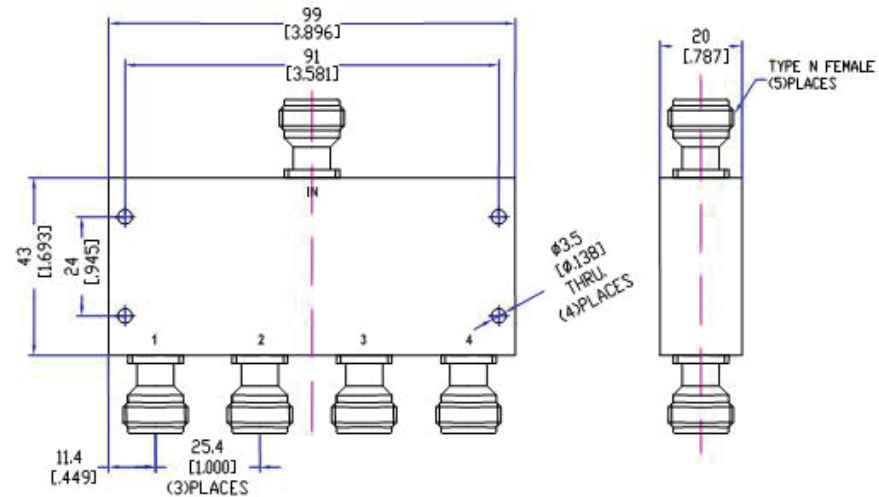
INITIAL

Electrical Data

Impedance	50 Ω
Frequency Range	2-6 GHz.
Phase Balance	$\leq \pm 3^\circ$
Amplitude Balance	$\leq \pm 0.3\text{dB}$
Isolation	≥ 20
VSWR	Input ≤ 1.50 Output ≤ 1.40
Insertion Loss	≤ 1.4 (excluding the Theoretical Loss 6dB)
Input Power	5W

Mechanical Data

Temperature Range: -45 °C - 85 °C

RoHS Compliant

Drawing not to scale. Dimensions for reference only

Units: mm (Inches)

Konnect RFWWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KPD177912

DESCRIPTION

Power Combiner, 4 Way, N Female Input, N Female Output

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.