

PART NUMBER

**KPD177952**

REV.

DATE

COMMENTS

INITIAL


**Electrical Data**

Impedance	50 $\Omega$
Frequency Range	1 ~ 6 GHz.
Insertion Loss	3.0 dB Max
Isolation	16 dB Min
VSWR	1.80 Max
Amplitude Balance	$\pm 0.6$ dB Max
Phase Balance	$\pm 15$ °C
Power Handling	10W

RoHS Compliant

**Mechanical Data**

Temperature Range: -40 °C ~ +70 °C

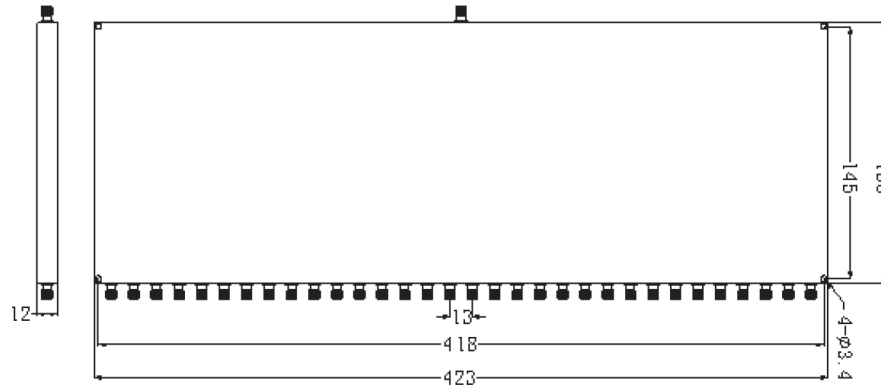

Drawing not to scale. Dimensions for reference only

Units: mm

**Konnect RF**

**WWW.KONNECTRF.COM**  
**1-800-790-5887**

PART NUMBER

**KPD177952**

DESCRIPTION

**Power Divider, 32 Way, SMA Female**

CAGE CODE

**664U0**

SIGNATURE

X

THIS DRAWING INCLUDING THE  
DESIGNS IS THE PROPERTY OF  
KONNECT RF AND IS NOT TO  
BE USED FOR ANY PURPOSE  
WITHOUT OUR APPROVAL.