PART NUMBER

KPD178017

REV.	DATE	COMMENTS	INITIAL

RoHS Compliant

Electrical Data

Impedance 50 Ω

Frequency Range 0.121 ± 0.020 GHz.


VSWR ≤ 1.30
Insertion Loss 0.3 dB
Split Loss 6.0 dB
Average Power 200W Max

Peak Power 6KW Max Pulse wave: 20ms/1s

Mechanical Data

Environment indoor

Temperature Range: -25 °C - 75 °C

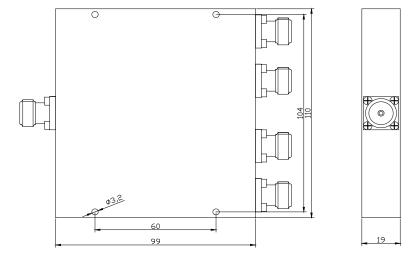

Drawing not to scale. Dimensions for reference only

Units: mm

H Konnect RF

WWW.KONNECTRF.COM 1-800-790-5887

KPD	178017	DESCRIPTION High Power Divider, 4 Way, N Female			
664U0	SIGNATURE X	Component Body	Material	Plating Powder	
DESIGNS IS T KONNECT RF	G INCLUDING THE HE PROPERTY OF AND IS NOT TO ANY PURPOSE R APPROVAL.				