

PART NUMBER

KPD178030

REV.

DATE

COMMENTS

INITIAL


Electrical Data

Impedance	50 Ω
Frequency Range	6000-18000MHz
Insertion Loss	≤ 2.2 dB
Amplitude Balance	$\leq \pm 1.0$ dB
Phase Balance	$\leq \pm 12$ Degrees
Isolation	≥ 16 dB
Average Power	20W (Forward)/ 2W (Reverse)
VSWR	≤ 2.0 (Input), ≤ 1.7 (Output)

RoHS Compliant

Mechanical Data

Temperature Range:	-40 $^{\circ}$ C - 80 $^{\circ}$ C
Storage Temperature	-40 $^{\circ}$ C - 80 $^{\circ}$ C

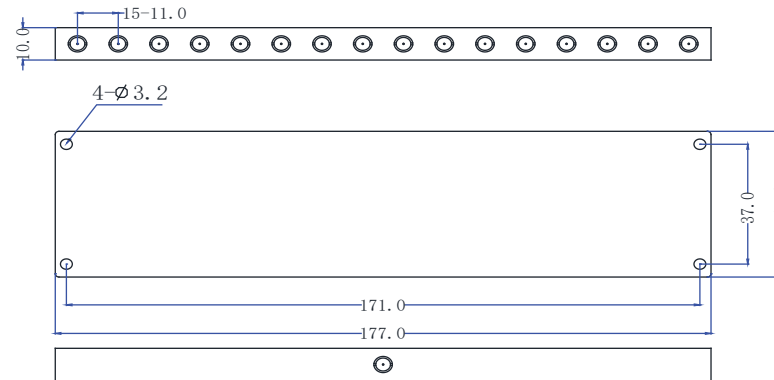

Drawing not to scale. Dimensions for reference only

Units: mm

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KPD178030

DESCRIPTION

Power Divider, 16 Way, SMP Female

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.