

PART NUMBER

**KPD178036**

REV.

DATE

COMMENTS

INITIAL


## Electrical Data

Impedance	50Ω
Frequency Range	2000-18000MHz.
Insertion Loss	≤3.0dB (Exclusive the 12dB Split Loss)
VSWR	≤2.0 (Input)
	≤1.6 (Output)
Amplitude Balance`	≤±0.8dB
Phase Balance	≤±10degree
Isolation	≥15dB
Average Power	20W ( Forward )
	2W (Reverse)

RoHS Compliant

## Mechanical Data

Operational Temperature :	-40 °C - 80 °C
Storage Temperature	-45 to +85 °C

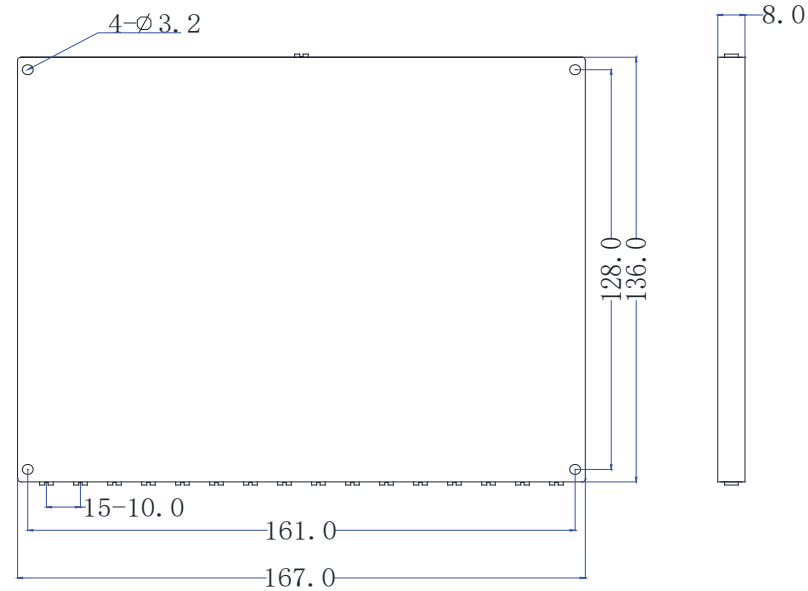

Drawing not to scale. Dimensions for reference only

Units: mm (±0.3mm)

WWW.KONNECTRF.COM  
1-800-790-5887

PART NUMBER

**KPD178036**

DESCRIPTION

**Power Divider, 16 Way, SMP Female**

CAGE CODE

**664U0**

SIGNATURE

X

Component  
BodyPlating  
Grey Paint

THIS DRAWING INCLUDING THE  
DESIGNS IS THE PROPERTY OF  
KONNECT RF AND IS NOT TO  
BE USED FOR ANY PURPOSE  
WITHOUT OUR APPROVAL.