

PART NUMBER

**KSW177108**

REV.

DATE

COMMENTS

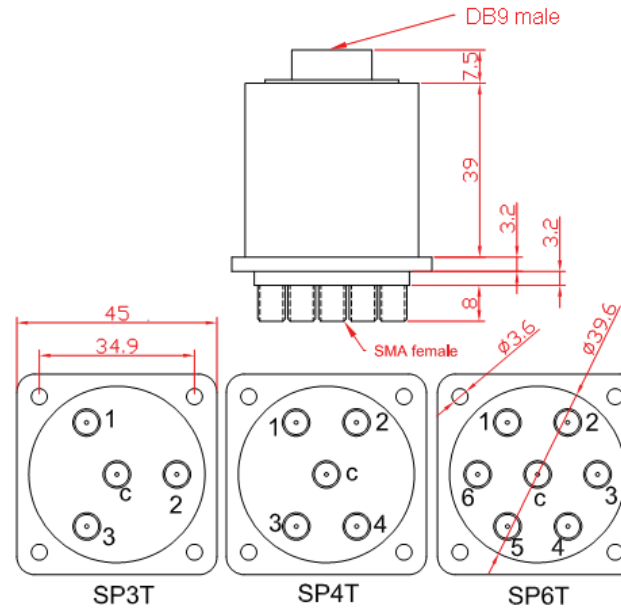
INITIAL

**Electrical Data**

Impedance	50 $\Omega$
Frequency Range	DC - 18 GHz.
Insertion Loss	<0.5 dB
Isolation	>60 dB
Power Handling	40 W
VSWR	<1.50

**Mechanical Data**

Temperature Range:	-30 °C - 65 °C
Control Voltage	DC-12V
Operating Voltage	DC12V/270mA
Switching Time	<15ms
Life	> 1,000,000
Switching sequence	Break Before Make

**RoHS Compliant**

Drawing not to scale. Dimensions for reference only

Units: mm

**Konnect RF**

WWW.KONNECTRF.COM  
1-800-790-5887

PART NUMBER

**KSW177108**

DESCRIPTION

**Switch, SP3T, Normally Open Type, SMA Female W/ TTL Control, Anti Vibration**

CAGE CODE

**664U0**

SIGNATURE

X

THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.