

PART NUMBER

KSW177135

REV.

DATE

COMMENTS

INITIAL


Electrical Data

Impedance	50 Ω
Frequency Range	6 - 12.4 GHz.
Insertion Loss	\leq 0.40 dB
Isolation	\geq 65 dB
Power Handling (CW)	20 W
Terminations Power Handling (CW)	1 W
Operating Voltage	DC 24 V / 160 mA
Switching Time	\leq 20 ms
Switching Sequence	Break Before Make
VSWR	\leq 1.40

Mechanical Data

Durability	\geq 2,000,000 cycles
Temperature Range:	-30 °C - 60 °C

RoHS Compliant

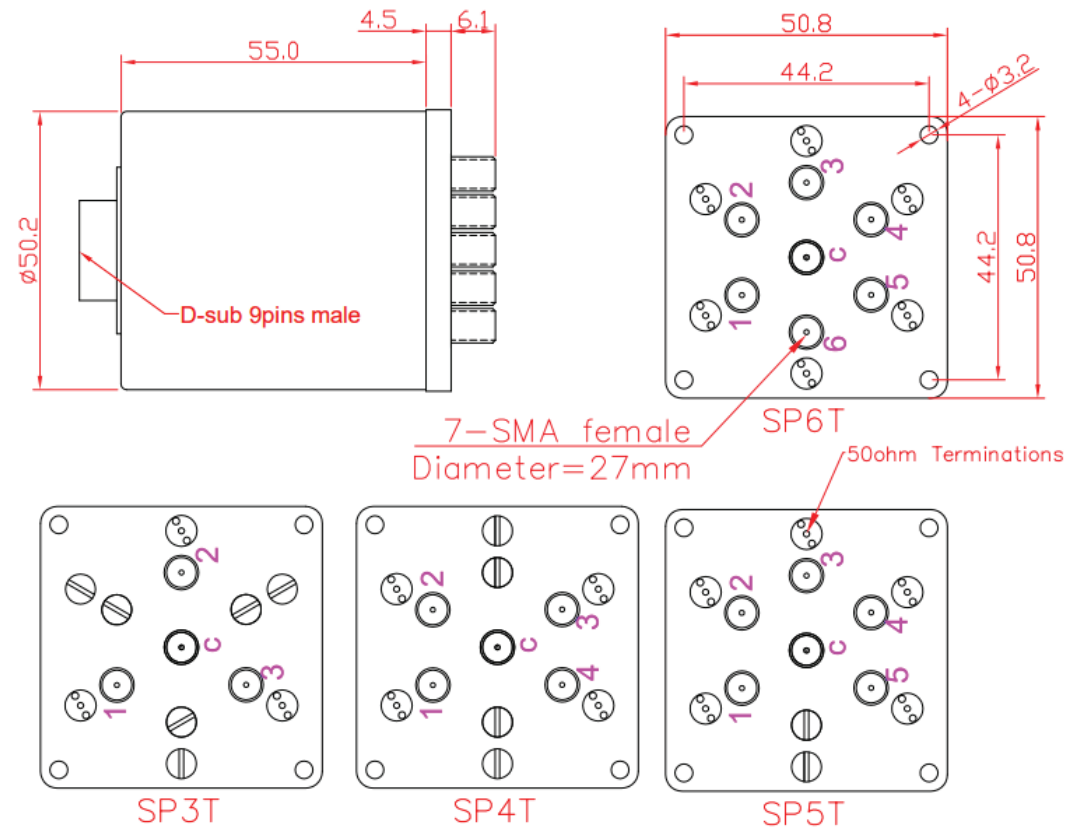

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KSW177135

DESCRIPTION

Switch, SP4T Normally Open Type, With Internal Termination

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.