PART NUMBER

KSW177310

REV.	DATE	COMMENTS	INITIAL

RoHS Compliant

SP4T Failsafe Type(Reflective)

Impedance: 75 ohm

Frequency Range:DC-1GHZ 1-2GHZ 2-3GHZ Insertion Loss: <0.3dB <0.5dB <1.1dB
V.S.W.R <1.2 <1.4 <1.6
Isolation: >60dB >50dB >40dB

Switching Time <10ms
Electronical Life >300000 (1W@1GHZ)
RF Power Handing:10W@1GHZ(Max.)
DC Handing: 24V/0.5A

Control Voltage:DC12V/60mA

Option:DC24V/60mA; DC28V/60mA Working Tempreture: -40 - +70 Degree


RF Interface: BNC female P/N CUS1201
Option: F female P/N CUS1201F

RF Path

C2=C3=C4=0V, J0 to J1 C2=12V,C3=C4=0V, J0 to J2 C3=12V,C2=C4=0V, J0 to J3 C4=12V,C2=C3=0V, J0 to J4

Drawing not to scale. Dimensions for reference only

Units: mm

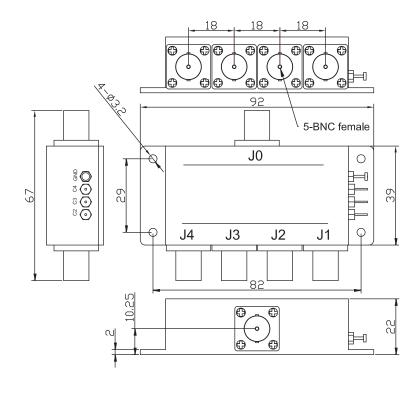

H Konnect RF

WWW.KONNECTRF.COM 1-800-790-5887

