

PART NUMBER

KTM177253

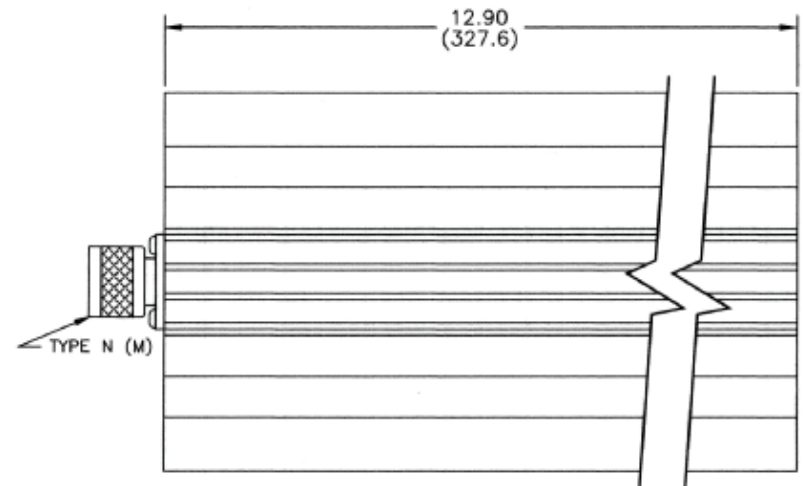
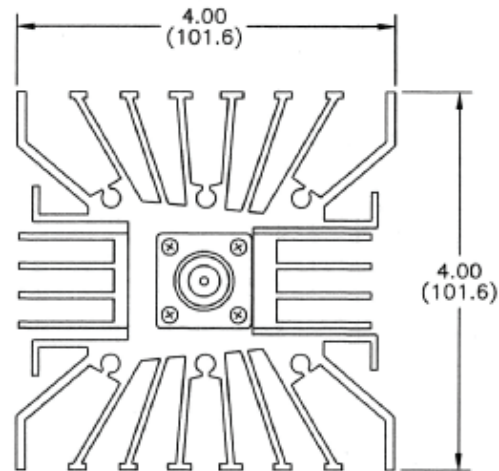
REV.

INITIAL

Electrical Data

Impedance 50 Ω
 Frequency Range DC - 3.0 GHz
 VSWR 1.20:1 Max. DC - 1.0 GHz
 1.25:1 Max. 1.0 - 2.0 GHz
 1.35:1 Max. 2.0 - 3.0 GHz

Input Power (Avg.) 500 Watts
 Input Power (Peak) 2000 Watts
 Operating Temperature -55°C to + 125°C

RoHS Compliant

VSWR and Frequency Range Specifications are for reference and are dependant on cable type and other application specific conditions

Drawing not to scale. Dimensions for reference only

WWW.KONNECTRF.COM
 540 NW University Blvd. Ste. 109
 Port Saint Lucie, Florida, 34986
 1-800-790-5887

PART NUMBER

KTM177253

DESCRIPTION

**Termination
N Male Plug**

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.