

PART NUMBER

KTM177353

REV.

DATE

COMMENTS

INITIAL

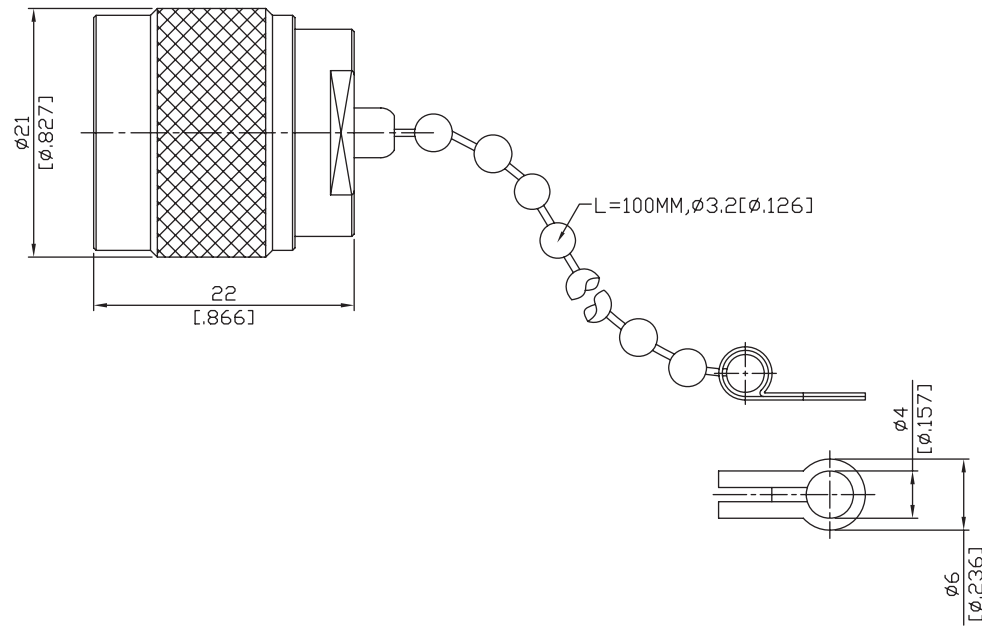
A

6/2/2020

Updated Body Design

Electrical Data

Impedance $50 \pm 0.5 \Omega$
 Average Power 2W Average Power from -55°C to 70°C Linearly derated to 1 Watt at 165°C
 Frequency Range DC - 6 GHz.
 VSWR ≤ 1.2 @ 6GHz

RoHS Compliant

Drawing not to scale. Dimensions for reference only

Units: mm (Inches)

Konnect RF

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KTM177353

DESCRIPTION

Termination, N Male Plug

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.

Component

Body & Coupling Nut
 Free Reed
 Center Contact

Material

Brass
 Brass
 BeCu

Plating(Micro-Inch)

White Bronze
 White Bronze
 Gold 4 Over Nickel Phosphorus Alloy
 80 Over copper 20
 White Bronze
 White Bronze
 White Bronze

Retaining Ring
 Contact Body
 Chain Plate
 Insulator
 Gasket

Brass
 Brass
 Brass

PTFE
 Silicone Rubber