

PART NUMBER

KTM177665

REV.

DATE

COMMENTS

INITIAL

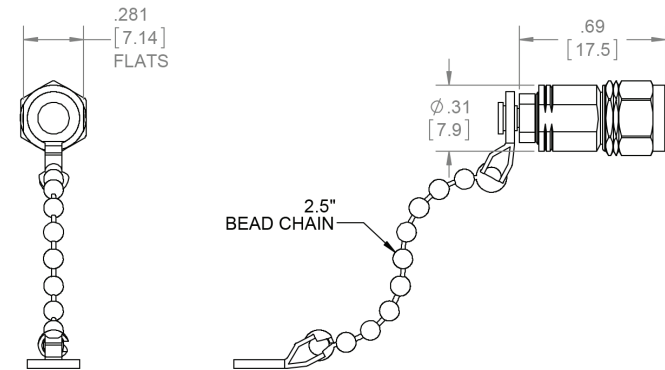
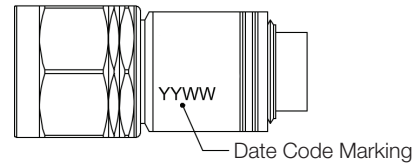
Electrical Data

Impedance 50 Ω
 Frequency Range DC - 65 GHz.
 Average Power 1 Watt
 (@ 25°C Derates Linearly to 10% @ + 125 °C)

VSWR
 1.20 @ DC-18 GHz
 1.30 @ 18-40 GHz
 1.60 @ 40-65 GHz

Mechanical Data

Temperature Range: -55 °C - 100 °C

**RoHS Compliant**

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

Konnect RF

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KTM177665

DESCRIPTION

Termination, 1.85mm Male Plug w/ Chain

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.

Component

Body
 Bead Chain
 Center Contact
 Insulator

Material

Stainless Steel
 Stainless Steel
 BeCu
 PTFE

Plating/Finish

Passivated
 Passivated
 Gold
 Gold