

PART NUMBER

KTM187011

REV.

DATE

COMMENTS

INITIAL


Electrical Data

Impedance 50 Ω
 Frequency Range DC - 67 GHz.
 Average Power 2 Watts average to 25°C ambient temperature.
 derated linearly to 0.1 W @ 125°C
 Peak Power 20 W
 VSWR 1.15 max

Mechanical Data

Mating Cycles 500 Cycles Min.
 Operating Temperature Range -55 °C - 125 °C
 Storage Temperature Range -55 °C - 125 °C

RoHS Compliant

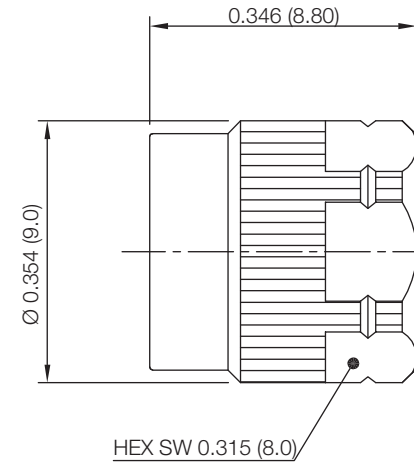

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KTM187011

DESCRIPTION

Termination, 1.85mm Male Plug

CAGE CODE

664U0

SIGNATURE

X

Component
 Body & Nut
 Center Contact
 Insulator

Material
 Stainless Steel
 BeCu
 PEI

Plating
 Passivated
 Gold

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.