

PART NUMBER

KAT178221-XX

REV.

DATE

COMMENTS

INITIAL


Electrical Data

Impedance 50 Ω
 Frequency Range DC - 40 GHz.
 Insertion Loss 1-10dB \pm 1.0@DC-40GHz
 Power Rating \geq 0.5W
 Attenuation Range 1-40 dB +/- 1.0 dB
 VSWR \leq 1.35

RoHS Compliant

Mechanical Data

Temperature Range: -40 $^{\circ}$ C - 60 $^{\circ}$ C
 Uni-Directional

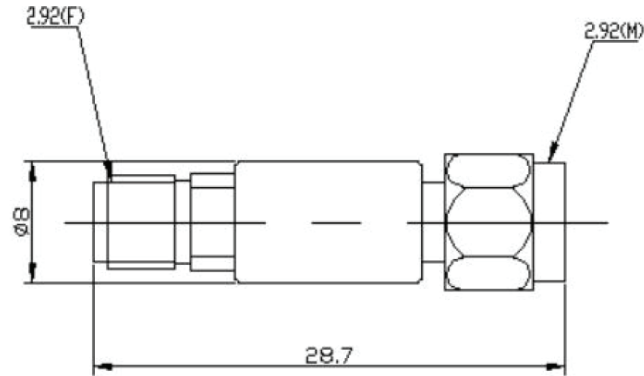

Drawing not to scale. Dimensions for reference only

Units: mm

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KAT178221-XX

DESCRIPTION

Fixed Attenuator, 2.92mm Male Input/Female Output, Uni-Directional

CAGE CODE

664U0

SIGNATURE

X

*XX= dB Value

Component
BodyMaterial
Stainless SteelPlating
Passivated

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.