

PART NUMBER

KAT178380-XX

REV.

DATE

COMMENTS

INITIAL


RoHS Compliant

Electrical Data

Impedance 50 Ω
 Average Power 5W
 Peak Power 0.5KW

Mechanical Data

Temperature Range: -55 °C - 125 °C

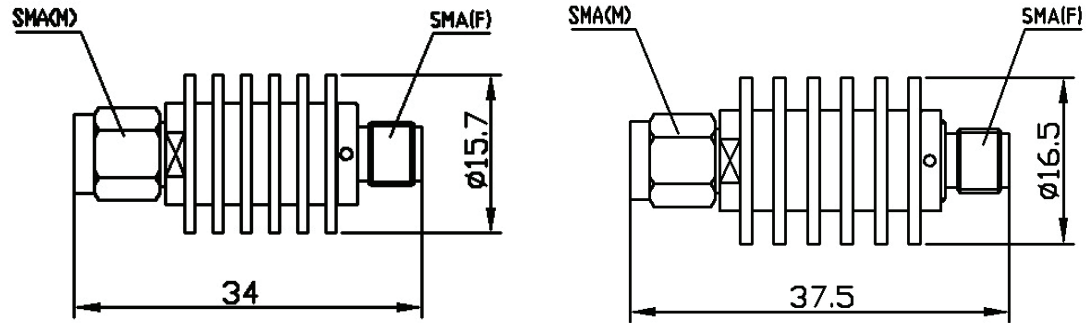

KAT178380-XX	Frequency Range	Attenuation Value & Accuracy (dB)							Max VSWR
		3	6	10	20	30	40	50	
KAT178380-03	DC-3	± 0.3	± 0.3	± 0.3	± 0.3	± 0.4	/	/	1.15
KAT178380-06	DC-6	± 0.4	± 0.4	± 0.4	± 0.4	± 0.5	/	/	1.20

Drawing not to scale. Dimensions for reference only Units: mm

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KAT178380-XX

DESCRIPTION

Fixed Attenuator, SMA Male/Female

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.

Component

Housing
 Connectors
 Male Pin
 Female Pin
 Insulator

Material

Aluminum
 Brass
 Brass
 BeCu
 PTFE

Plating

Black Anodize
 Nickel
 Gold
 Gold