

PART NUMBER

KCC188937

REV.

DATE

COMMENTS

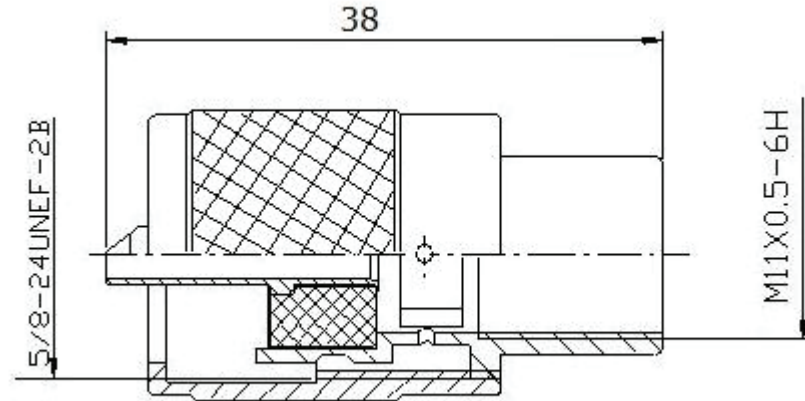
INITIAL

Electrical Data

Impedance	50Ω
Frequency Range	DC-4GHz
Working Voltage	750 V Max
Withstanding Voltage	2,000V rms (At Sea Level)
Contact Resistance	
Center	≤ 5 mΩ
Outer	≤ 5 mΩ
Insulation Resistance	5,000 MΩ

Mechanical Data

Durability	≤ 500 Cycles Min.
Temperature Range:	-40 °C - 85°C

RoHS Compliant

Drawing not to scale. Dimensions for reference only

Units: mm

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KCC188937

DESCRIPTION

UHF Straight Male Plug

CAGE CODE

664U0

SIGNATURE

X

Cable Types: LMR-400**Component**Body , Shell & Pin
Insulator**Material**Brass
PTFE**Plating**

Silver

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.