

PART NUMBER

**KCC198192**

REV.

DATE

COMMENTS

INITIAL


**Electrical Data**

Impedance 50  $\Omega$   
 Frequency Range DC - 40 GHz.  
 VSWR  $\leq 1.40$  Max

**Mechanical Data**

Temperature Range: -55 °C - 165°C

RoHS Compliant

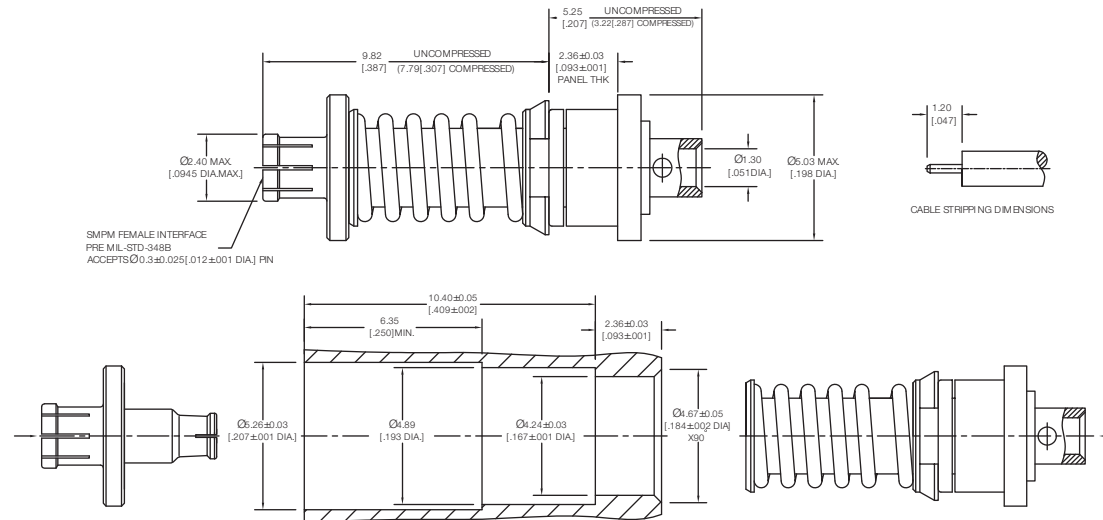

**VSWR and Frequency Range Specifications are for reference and are dependant on cable type and other application specific conditions**

**Drawing not to scale. Dimensions for reference only**

**Units: mm (inches)**

**WWW.KONNECTRF.COM**  
**1-800-790-5887**

PART NUMBER

**KCC198192**

DESCRIPTION

**SMPM Straight Female w/Compression Spring, Plug-In Contact for Installation into VITA 67.3**

CAGE CODE

**664U0**

SIGNATURE

X

**Cable Types: .047" Cable**

Component	Material	Plating
Body	BeCu	Gold
Center Contact	BeCu	Gold
Insulator	PTFE	
Compression Spring	Stainless Steel	Passivated
Sleeve & Washer	Stainless Steel	Passivated

THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.