

PART NUMBER

KCC198260

REV.

DATE

COMMENTS

INITIAL


Electrical Data

Impedance 50 Ω
 Frequency Range DC - 26.5 GHz.
 Insulation Resistance $\geq 5,000 \text{ M}\Omega$
 Dielectric Withstanding Voltage 1,000 VRMS
 VSWR ≤ 1.30

Mechanical Data

Durability 500 Cycles Min.
 Temperature Range: -55 °C - 165 °C

RoHS Compliant

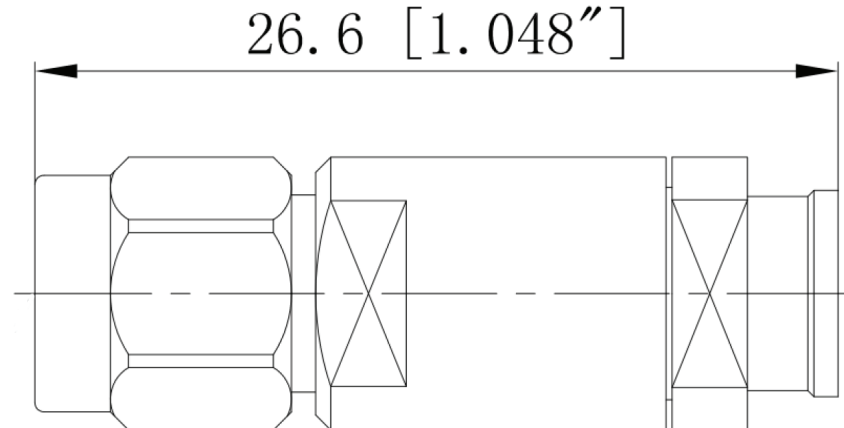

**VSWR and Frequency Range Specifications
 are for reference and are dependant on cable
 type and other application specific conditions**

Drawing not to scale. Dimensions for reference only

Units: mm (inches)

**WWW.KONNECTRF.COM
 1-800-790-5887**

PART NUMBER

KCC198260

DESCRIPTION

SMA Straight Male Plug, Crimp

CAGE CODE

664U0

SIGNATURE

X

**Cable Types: Ultra-Flex Test Cable, PUR Jacket
 (KRC177631)**

Component

Body & Nut
 Center Contact
 Insulator

Material

Stainless Steel
 Brass
 PTFE

Plating

Passivated
 Gold

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.