

PART NUMBER <div style="font-size: 24pt; font-weight: bold; text-align: center;">KCC198276</div>		REV.	DATE	COMMENTS	INITIAL

Electrical Data


Impedance 50 Ω


Frequency Range DC - 110 GHz.

Mechanical Data

Temperature Range: -55 °C - 165 °C

RoHS Compliant

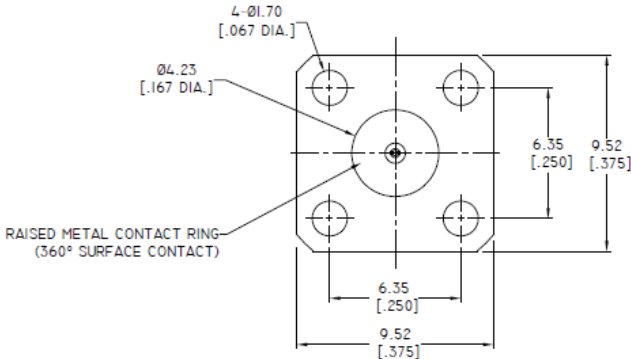

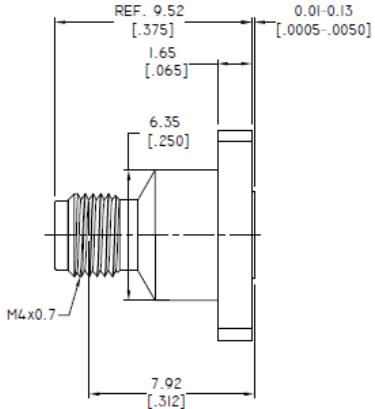


Accepts .009" Pin for Socket

Drawing not to scale. Dimensions for reference only Units: mm (inches)



WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER <div style="font-size: 24pt; font-weight: bold; text-align: center;">KCC198276</div>		DESCRIPTION 1.0mm Straight Female Jack Field Replaceable Receptacle, 4 Hole Flange Mount													
CAGE CODE <div style="font-size: 24pt; font-weight: bold;">664U0</div>	SIGNATURE X 	<table style="width: 100%;"><tr><td style="width: 33%;">Component</td><td style="width: 33%;">Material</td><td style="width: 33%;">Plating</td></tr><tr><td>Body</td><td>Stainless Steel</td><td>Passivated</td></tr><tr><td>Center Contact</td><td>BeCu</td><td>Gold</td></tr><tr><td>Insulator</td><td>PEI & PTFE</td><td></td></tr></table>		Component	Material	Plating	Body	Stainless Steel	Passivated	Center Contact	BeCu	Gold	Insulator	PEI & PTFE	
Component	Material			Plating											
Body	Stainless Steel	Passivated													
Center Contact	BeCu	Gold													
Insulator	PEI & PTFE														
THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.															