

PART NUMBER

**KDT177111**

REV.

DATE

COMMENTS

INITIAL


**Electrical Data**

Impedance 50  $\Omega$   
 Frequency Range 0.01 - 18 GHz.  
 Frequency Response  $\pm 0.5$  dB  
 Voltage Sensitivity 500 mV/mW  
 Low Level Sensitivity -30 dBm  
 Input Power +20 dBm (100mW)  
 VSWR 1.80

**Mechanical Data**

Temperature Range: -20  $^{\circ}$ C - 55  $^{\circ}$ C

RoHS Compliant

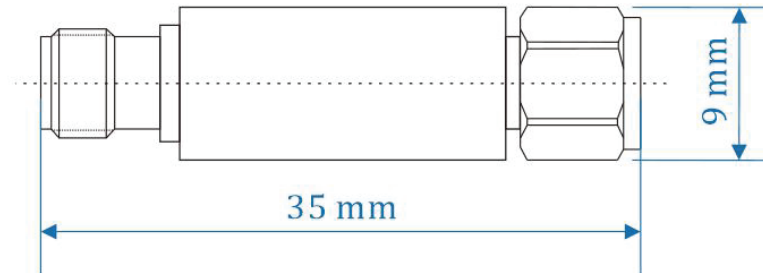

Drawing not to scale. Dimensions for reference only

Units: mm

WWW.KONNECTRF.COM  
 1-800-790-5887

PART NUMBER

**KDT177111**

DESCRIPTION

**Detector, SMA Male Plug Input/Female Jack Output**

CAGE CODE

**664U0**

SIGNATURE

X

THIS DRAWING INCLUDING THE  
 DESIGNS IS THE PROPERTY OF  
 KONNECT RF AND IS NOT TO  
 BE USED FOR ANY PURPOSE  
 WITHOUT OUR APPROVAL.

**Component**

Connectors  
 Male Pin  
 Female Pin  
 Housing

**Material**

Brass  
 Brass  
 BeCu  
 Brass

**Plating**

Nickel  
 Gold  
 Gold  
 Nickel