

PART NUMBER

KDT177308

REV.

DATE

COMMENTS

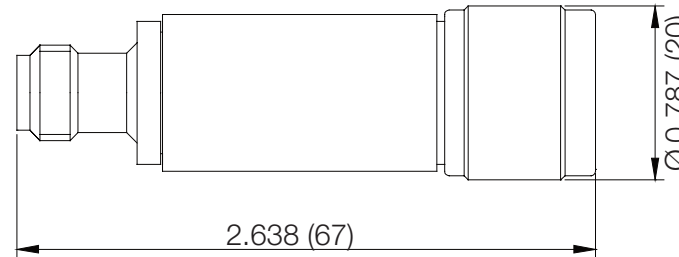
INITIAL

Electrical Data

Impedance 50 Ω
 Frequency Range 0.01 - 18 GHz.
 Frequency Response +/- 1.2 dB
 Low Level Sensitivity (-30dBm) \geq 0.5mV
 Max Power 100 mW
 VSWR \leq 2.2

Mechanical Data

Temperature Range: -20 °C - 55 °C

RoHS Compliant

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

Konnect RF

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KDT177308

DESCRIPTION

Detector, N Male Plug Input/BNC Female Jack Output, Positive Polarity

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.

Component

Connectors
 Housing
 N Male Plug Pin
 BNC Female Jack Pin

Material

Brass
 Brass
 Brass
 BeCu

Plating

Nickel
 Nickel
 Gold
 Gold