

PART NUMBER

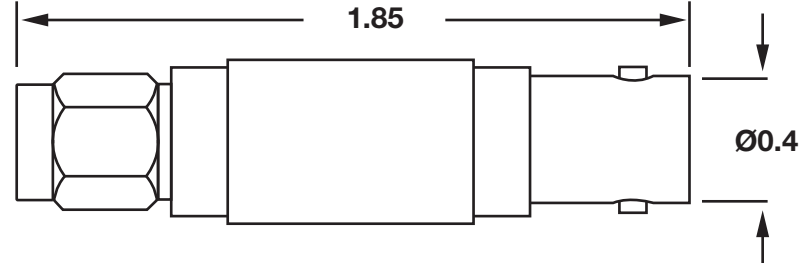
KDT177440

REV.

INITIAL

Electrical Data

Impedance	50 Ω
Frequency Range	100 MHz - 20 GHz
Frequency Response	± 0.3 dB
VSWR	1.3 Max.
Power	200m,W,CW
Low Level Sensitivity	0.5 mV/ μ W
Video Impedance	0.8 - 7.5 K Ω
Output Capacitance	3.0 pF
Maximum Input	100 mW
Temperature Range	-54°C - 100°C

RoHS Compliant

VSWR and Frequency Range Specifications are for reference and are dependant on cable type and other application specific conditions

Drawing not to scale. Dimensions for reference only

WWW.KONNECTRF.COM
540 NW University Blvd. Ste. 109
Port Saint Lucie, Florida, 34986
1-800-790-5887

PART NUMBER

KDT177440

DESCRIPTION

Detector - 3.5mm Male Plug Input BNC Female Jack Output - Positive Polarity

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.