

PART NUMBER

**KFL177321**

REV.

DATE

COMMENTS

INITIAL

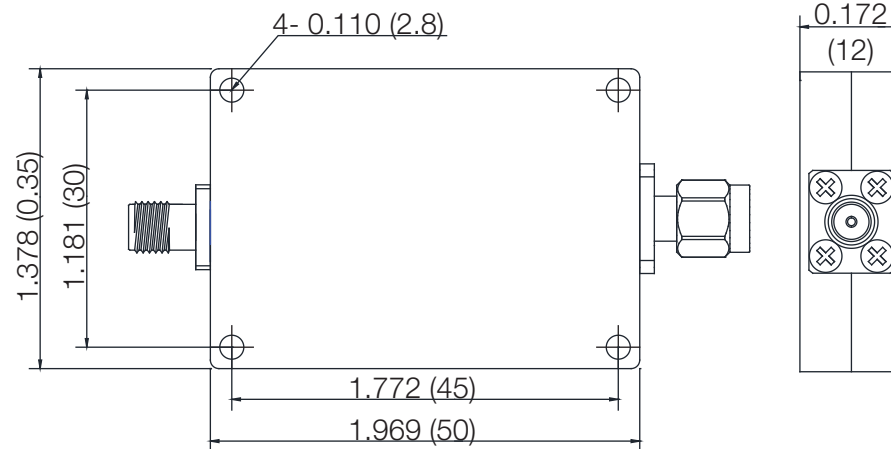
**Electrical Data**

Impedance	50 $\Omega$
Passband	DC-1500MHz
Insertion Loss	$\leq 1.5$ dB
Average Power	20W
Rejection	$\geq 80$ dB @ 3500 - 8000MHz
VSWR	$\leq 1.5$

RoHS Compliant

**Mechanical Data**

Operating Temperature Range:	-54 $^{\circ}$ C - 85 $^{\circ}$ C
Storage Temperature Range:	-55 $^{\circ}$ C - 90 $^{\circ}$ C

**Drawing not to scale. Dimensions for reference only****Units: inches Inches (mm)****Tolerance:  $\pm 0.020$  (0.5mm)****Konnect RF**

**WWW.KONNECTRF.COM**  
**1-800-790-5887**

PART NUMBER

**KFL177321**

DESCRIPTION

**Filter, Low Pass, SMA Male/Female**

CAGE CODE

**664U0**

SIGNATURE

X

**Component**  
Body**Plating**  
Black Paint

THIS DRAWING INCLUDING THE  
DESIGNS IS THE PROPERTY OF  
KONNECT RF AND IS NOT TO  
BE USED FOR ANY PURPOSE  
WITHOUT OUR APPROVAL.