

PART NUMBER

**KPD177442**

REV.


INITIAL

**Electrical Data**

Impedance 50  $\Omega$   
 Frequency Range 0.5 - 18 GHz  
 Insertion Loss 2.2 dB Max.  
 Isolation 15 dB Min.  
 Phase Balance  $\pm 14$  Deg. Max.  
 Amplitude Balance  $\pm 0.5$  dB Max.  
 Power 10 Watts (Load VSWR @1.2)

**RoHS Compliant**

VSWR Input 1.60:1 Max.  
 Output 1.60:1 Max.

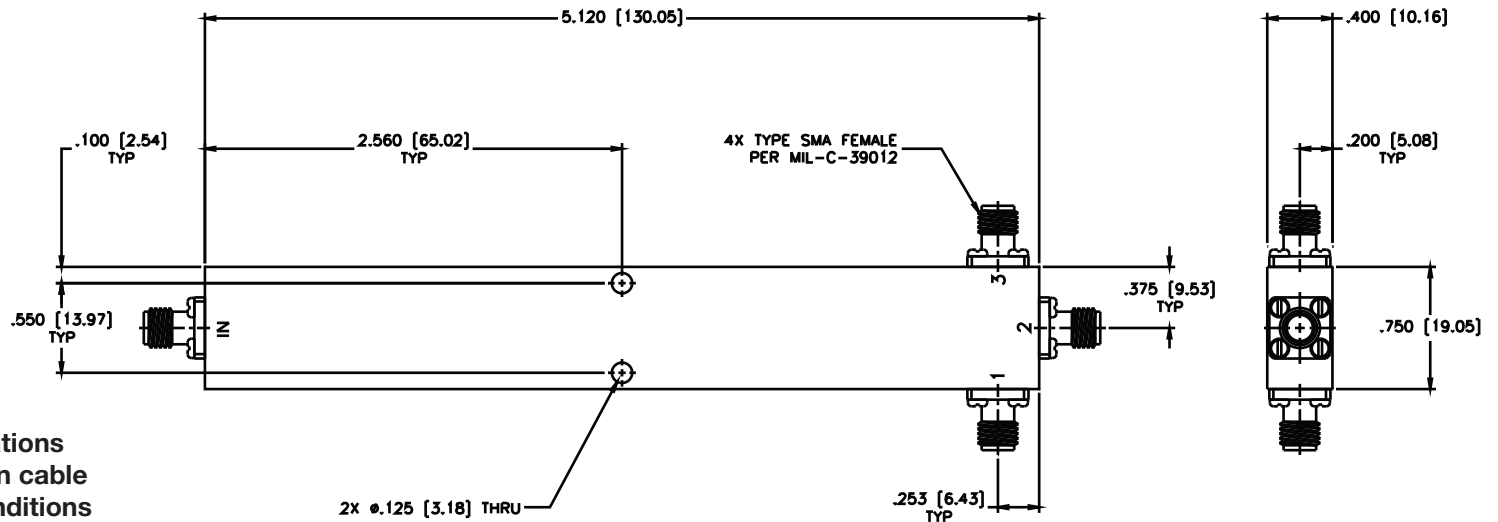

VSWR and Frequency Range Specifications  
 are for reference and are dependant on cable  
 type and other application specific conditions

Drawing not to scale. Dimensions for reference only

WWW.KONNECTRF.COM  
 540 NW University Blvd. Ste. 109  
 Port Saint Lucie, Florida, 34986  
 1-800-790-5887

PART NUMBER

**KPD177442**

DESCRIPTION

**Power Divider - 3-Way - SMA Female**

CAGE CODE

**664U0**

SIGNATURE

X

THIS DRAWING INCLUDING THE  
 DESIGNS IS THE PROPERTY OF  
 KONNECT RF AND IS NOT TO  
 BE USED FOR ANY PURPOSE  
 WITHOUT OUR APPROVAL.