

PART NUMBER

KPD177487

REV.

DATE

COMMENTS


INITIAL

Electrical Data

Impedance	50Ω
Frequency Range	2000-18000MHz.
Insertion Loss	≤3.0dB (Exclusive the 12dB Split Loss)
VSWR	≤2.0 (Input) ≤1.6 (Output)
Amplitude Balance`	≤±0.8dB
Phase Balance	≤±10degree
Isolation	≥15dB
Average Power	20W (Forward) 2W (Reverse)

RoHS Compliant**Mechanical Data**

Operational Temperature :	-40 °C - 80 °C
Storage Temperature	-45 to +85 °C

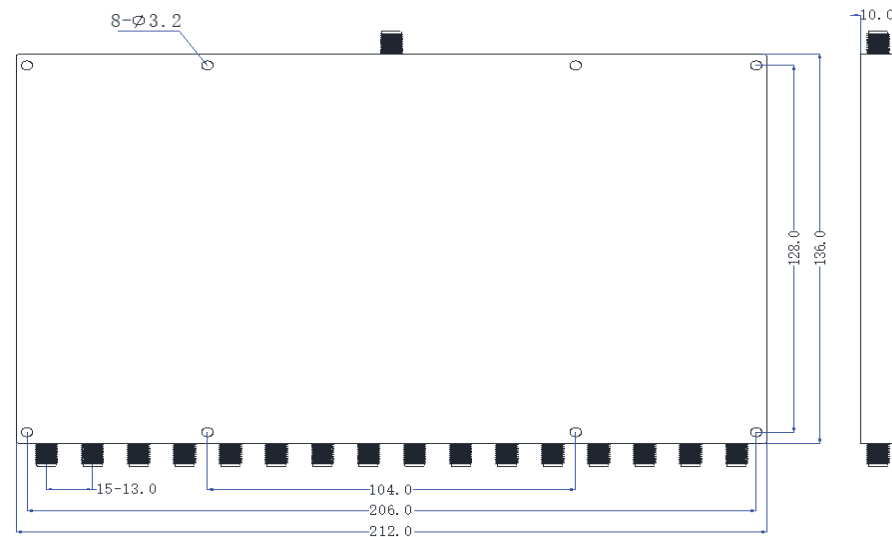

Drawing not to scale. Dimensions for reference only

Units: mm (±0.3mm)

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KPD177487

DESCRIPTION

Power Divider, 16 Way, SMA Female

CAGE CODE

664U0

SIGNATURE

X

Component
Body

Plating
Grey Paint

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.