

PART NUMBER

KPD177521

REV.

DATE

COMMENTS

INITIAL

Electrical Data

| | |
|-------------------|--------------------|
| Impedance | 50 Ω |
| Frequency Range | 1 - 40 GHz. |
| Insertion Loss | ≤ 2.4 dB |
| Isolation | ≥ 18 dB |
| Amplitude Balance | $\leq \pm 0.5$ dB |
| Phase Balance | $\leq \pm 5^\circ$ |
| VSWR | $\leq 1.60:1$ |


Mechanical Data

Temperature Range: -45 °C - 85 °C

Standards

| | |
|--------------------------|----------|
| Power Rating as Divider | 30 Watts |
| Power Rating as Combiner | 3 Watts |
| Port | 2 Way |

RoHS Compliant

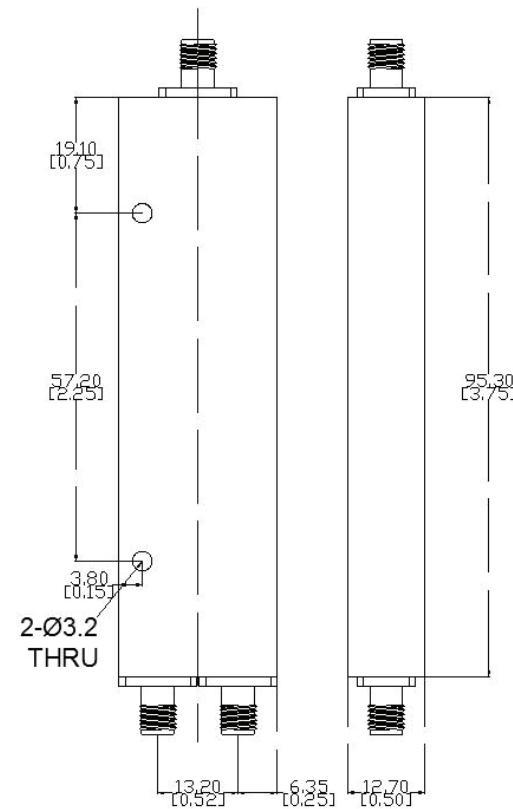

Drawing not to scale. Dimensions for reference only

Units: mm (inches)

Konnnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KPD177521

DESCRIPTION

Power Divider, 2 Way, 2.92 Female Jack

CAGE CODE

664U0

SIGNATURE

X

Component

Body

Material

Aluminum

THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.