

PART NUMBER

KPD177531

REV.

DATE

COMMENTS


INITIAL

Electrical Data

Impedance	50 Ω
Frequency Range	5-18 GHz.
Amplitude Unbalance	0.8 dB Max
Phase Unbalance	+/- 12°
Insertion Loss	3.8 dB Max
Isolation	16 dB
Forward Power	20 W CW
Reverse Power	1 W
VSWR	1.80 Min

RoHS Compliant**Mechanical Data**

Temperature Range: -55 °C - 85 °C

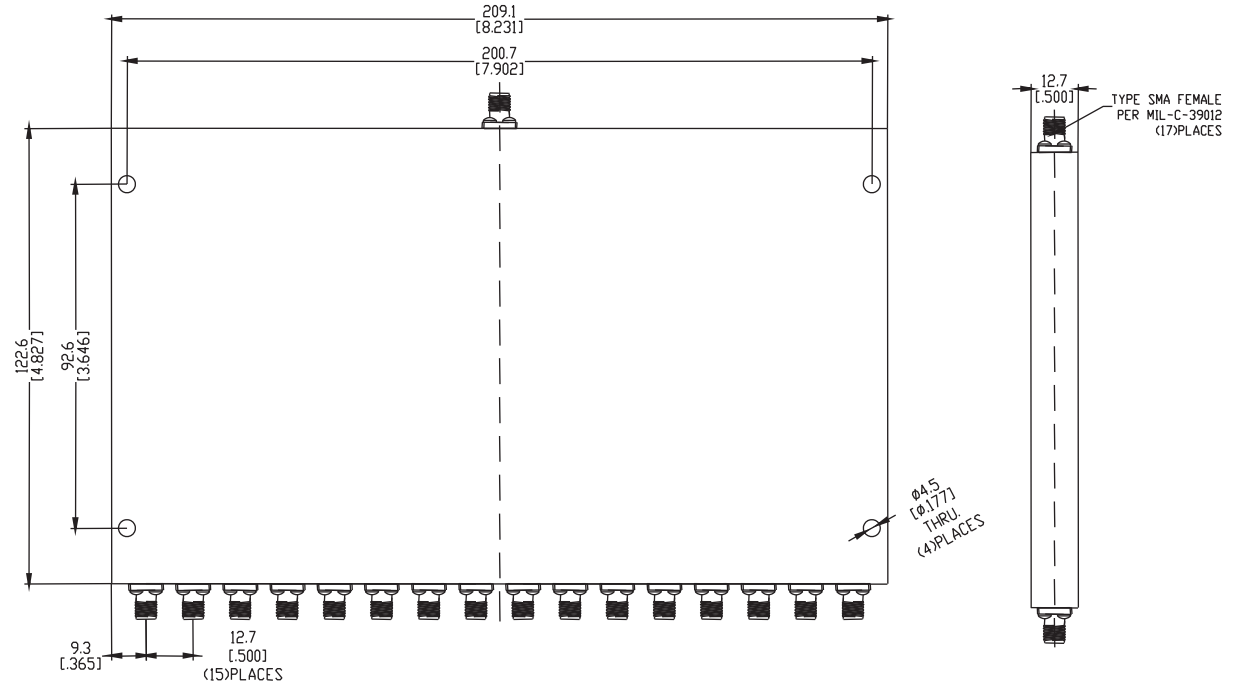

Drawing not to scale. Dimensions for reference only

Units: mm (Inches)

Konnnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KPD177531

DESCRIPTION

Power Divider, 16 Way, SMA Female

CAGE CODE

664U0

SIGNATURE

X

Component
Body

Material **Plating**
Aluminum Allow w/Black Paint

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.