

PART NUMBER

KPD178006

REV.

DATE

COMMENTS

INITIAL


RoHS Compliant

Electrical Data

Impedance	50 Ω
Frequency Range	1000-2000MHz
Insertion Loss	≤ 0.8 dB
Amplitude Balance	$\leq \pm 0.4$ dB
Phase Balance	$\leq \pm 8$ degree
Isolation	≥ 20 dB
Average Power	
Forward	20W
Reverse	1W
VSWR (Input & Output)	≤ 1.4

Mechanical Data

Operational Temperature	-40 $^{\circ}$ C - 80 $^{\circ}$ C
Storage Temperature Range:	-45 $^{\circ}$ C - 85 $^{\circ}$ C

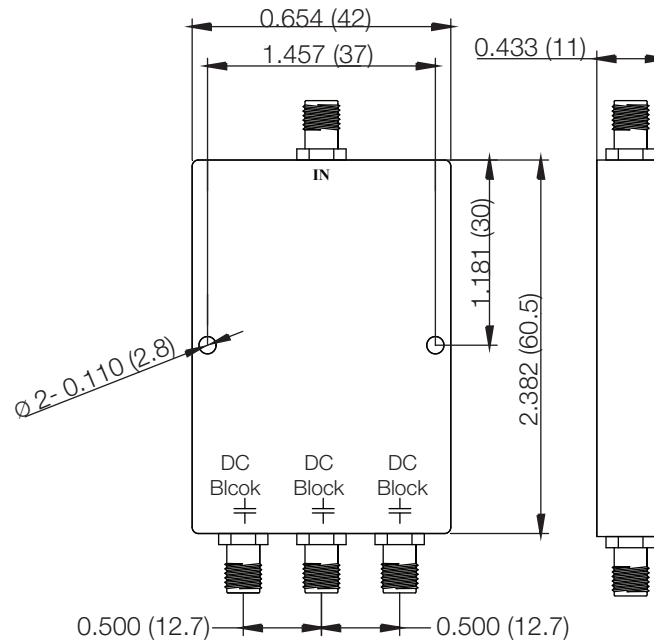

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

Tolerance: 0.020 (0.5)

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KPD178006

DESCRIPTION

Power Divider, 3 Way, SMA Female

CAGE CODE

664U0

SIGNATURE

X

Component
Body

Surface Finish
Grey Paint

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.