

PART NUMBER

**KWG177541**

REV.

DATE


COMMENTS

INITIAL

RoHS Compliant

**Electrical Data**

Impedance	50 $\Omega$
Frequency Range	9.4 $\pm$ 0.05 GHz.
Insertion Loss	0.4 dB Max
Isolation	20 dB Min
Power Handling	500 W (CW), 200 kW (Peak)
VSWR	1.25
WaveGuide Type	WR90
Flange Type	FBP100 (Cover) / FBM100 (Groved)

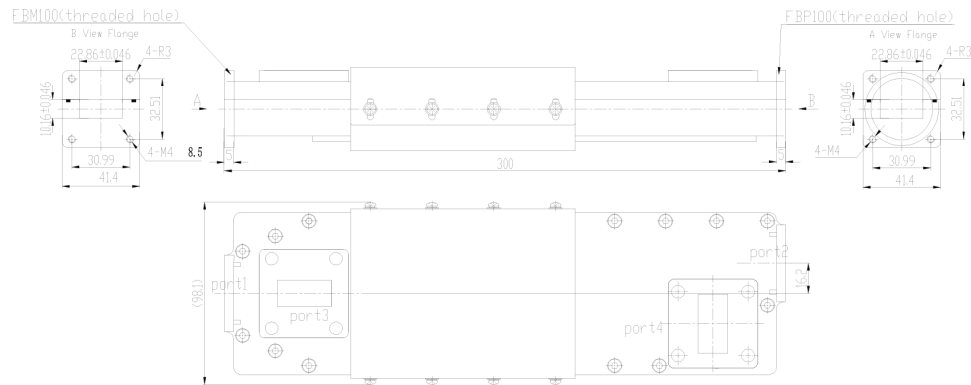

Drawing not to scale. Dimensions for reference only

Units: mm

**Konnect RF**

WWW.KONNECTRF.COM  
1-800-790-5887

PART NUMBER

**KWG177541**

DESCRIPTION

**Waveguide, High Power Circulator , WR90**

CAGE CODE

**664U0**

SIGNATURE

X

**Component**  
Body

**Material**  
Alumium

**Plating**  
Anticorrosion Grey Paint

THIS DRAWING INCLUDING THE  
DESIGNS IS THE PROPERTY OF  
KONNECT RF AND IS NOT TO  
BE USED FOR ANY PURPOSE  
WITHOUT OUR APPROVAL.