

PART NUMBER

KPD177452

REV.

DATE

COMMENTS


INITIAL

Electrical Data

Impedance	50 Ω
Frequency Range	DC - 2 GHz.
Insertion Loss	$\leq 12 \pm 1.0$ dB
Power Handling	2 W
VSWR	≤ 1.4

RoHS Compliant**Mechanical Data**

Operating Temperature Range:	-40 °C - 75 °C
Storage Temperature Range:	-55 °C - 85 °C

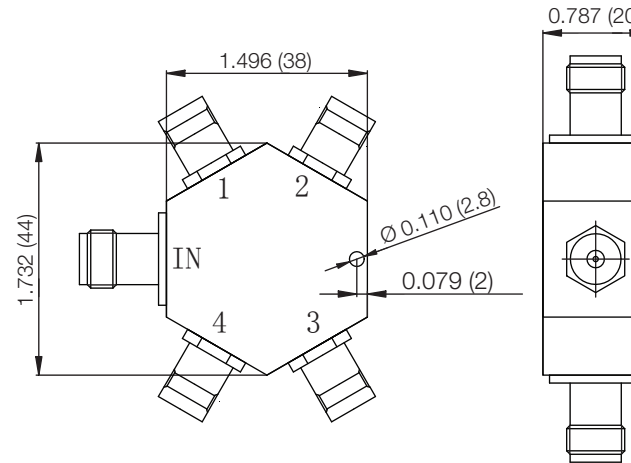

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

Size Tolerance ± 0.012 " (0.3)**Konnect RF**

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KPD177452

DESCRIPTION

Power Divider, Resistive, TNC Female Jack, 4 Way

CAGE CODE

664U0

SIGNATURE

X

Component
Body

Finish
Conductive Oxide (Silver White)

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.