

PART NUMBER

**KIMP177108**

REV.

DATE


COMMENTS

INITIAL

RoHS Compliant

**Electrical Data**

Impedance	50 $\Omega$ (BNC Female Side )
	75 $\Omega$ (F Male Side )
Insertion Loss	5.7 dB
Frequency Range	DC-3 Ghz
VSWR	1.50 Max
Input Power	1 Watt average

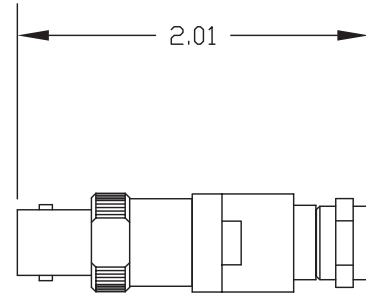

Drawing not to scale. Dimensions for reference only

Units: Inches

WWW.KONNECTRF.COM  
1-800-790-5887

PART NUMBER

**KIMP177108**

DESCRIPTION

**Impedance Matching Pad, 50 Ohm  
BNC Female Jack to 75 Ohm F Male Plug**

CAGE CODE

**664U0**

SIGNATURE

X

**Component**  
Body

**Material**  
Brass

**Plating**  
Nickel

THIS DRAWING INCLUDING THE  
DESIGNS IS THE PROPERTY OF  
KONNECT RF AND IS NOT TO  
BE USED FOR ANY PURPOSE  
WITHOUT OUR APPROVAL.