

PART NUMBER

**KPD177946**

REV.

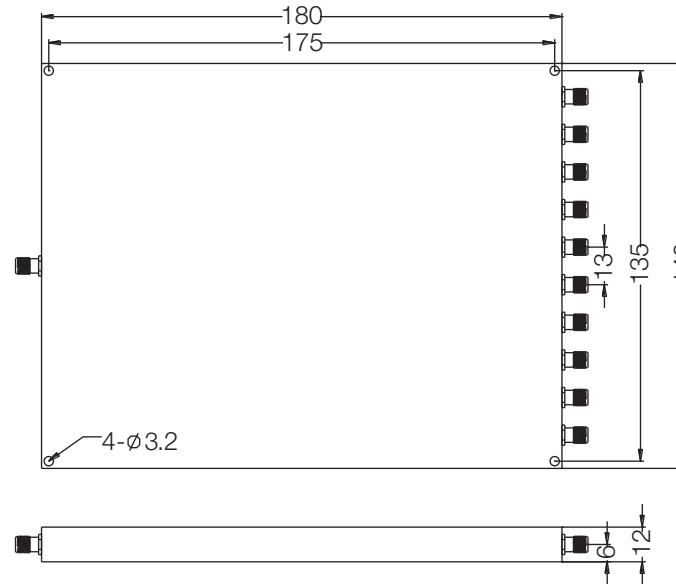
DATE

COMMENTS

INITIAL

**Electrical Data**

Impedance	50 $\Omega$
Frequency Range	0.5~6GHz
Insertion Loss	4.5dB max.
VSWR	(Input / Output) 1.8 max.
Isolation	16dB min
Phase Unbalance	$\pm 8^\circ$ max
Amplitude Unbalance	$\pm 0.8$ dB max
Power Handling	10W (input max.)

**RoHS Compliant**

Drawing not to scale. Dimensions for reference only

Units: mm

**Konnect RF**

WWW.KONNECTRF.COM  
1-800-790-5887

PART NUMBER

**KPD177946**

DESCRIPTION

**Power Divider, 10 Way, SMA Female**

CAGE CODE

**664U0**

SIGNATURE

X

THIS DRAWING INCLUDING THE  
DESIGNS IS THE PROPERTY OF  
KONNECT RF AND IS NOT TO  
BE USED FOR ANY PURPOSE  
WITHOUT OUR APPROVAL.