

PART NUMBER

**KWG177111**

REV.

DATE

COMMENTS

INITIAL

A

12/6/16

Updated Connector Style To Swept Right Angle

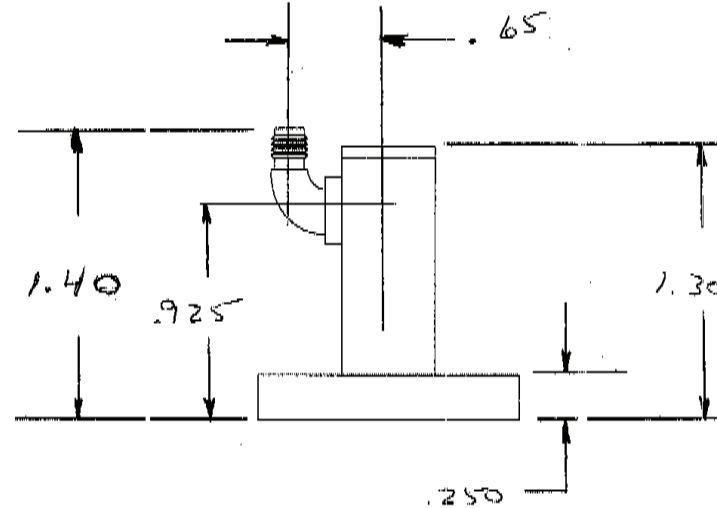
*MF***Electrical Data**

Frequency 12.5-15.0 GHz.  
 Power < 10 dBm  
 VSWR 1.15 (-23dB)

**Standards**

Temperature Range: -30 °C - 80 °C

T°Utilisation – Ambient  
 Flange Per Supplied Drawing  
 WR75 Half Height to the description

**RoHS Compliant**

Drawing not to scale. Dimensions for reference only

Units: inches

**Konnect RF**

WWW.KONNECTRF.COM  
 1-800-790-5887

PART NUMBER

**KWG177111**

DESCRIPTION

**Waveguide to Coaxial Adapter, WR75, SMA Swept Radius Right Angle**

CAGE CODE

**664U0**

SIGNATURE

*X**MF*

Component  
 Body

Material  
 Aluminum

Plating/Finish  
 Metalast TCP-HF FlatBlack Epoxy

THIS DRAWING INCLUDING THE  
 DESIGNS IS THE PROPERTY OF  
 KONNECT RF AND IS NOT TO  
 BE USED FOR ANY PURPOSE  
 WITHOUT OUR APPROVAL.