

PART NUMBER

**KWG177112**

REV.

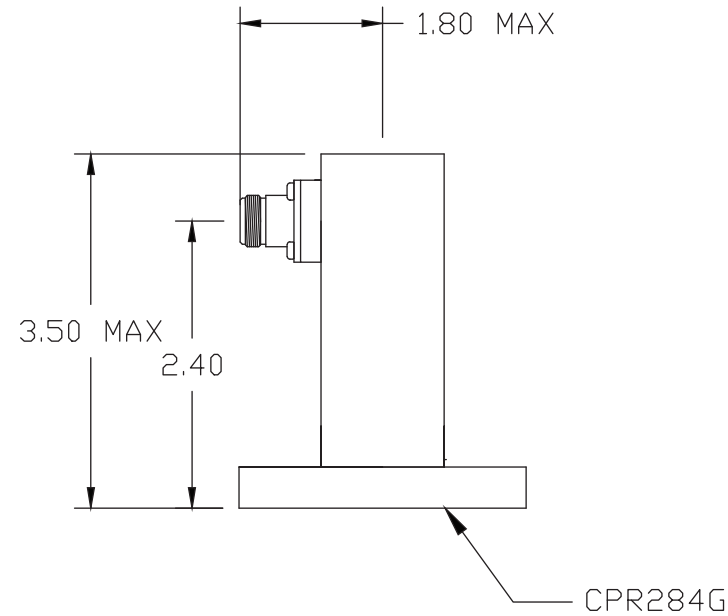
DATE

COMMENTS

INITIAL

**Electrical Data**

Frequency Range	2.80-3.80 GHz.
Insertion Loss	0.2
Average Power	5 Watts
Peak Power	250 Watts
VSWR	1.15 Max

**RoHS Compliant**

Drawing not to scale. Dimensions for reference only

Units: inches

**Konnect RF**

WWW.KONNECTRF.COM  
1-800-790-5887

PART NUMBER

**KWG177112**

DESCRIPTION

**Waveguide WR284 to Type N Female Adapter**

CAGE CODE

**664U0**

SIGNATURE

X

Component  
BodyMaterial  
6061 Aluminum AlloyPlating  
Metalast TCP-HFFLAT Black Epoxy

THIS DRAWING INCLUDING THE  
DESIGNS IS THE PROPERTY OF  
KONNECT RF AND IS NOT TO  
BE USED FOR ANY PURPOSE  
WITHOUT OUR APPROVAL.