

PART NUMBER

**KWG177122**

REV.

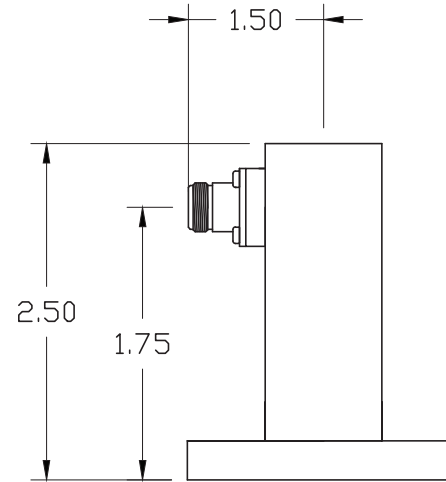
DATE

COMMENTS

INITIAL

**Electrical Data**

Frequency Range	3.95 - 5.85 GHz.
I.L.	.15
Flange	PDR48
VSWR	1.25

**RoHS Compliant**

Drawing not to scale. Dimensions for reference only

Units: inches

**Konnect RF**

WWW.KONNECTRF.COM  
1-800-790-5887

PART NUMBER

**KWG177122**

DESCRIPTION

**Waveguide to Coaxial Adapter, WR187  
to 90 Degree Type N Female Jack**

CAGE CODE

**664U0**

SIGNATURE

X **Component**  
Body**Material**  
Aluminum**Plating**  
Metalast TCP-HF Black Epoxy

THIS DRAWING INCLUDING THE  
DESIGNS IS THE PROPERTY OF  
KONNECT RF AND IS NOT TO  
BE USED FOR ANY PURPOSE  
WITHOUT OUR APPROVAL.