

PART NUMBER

KWG177212

REV.

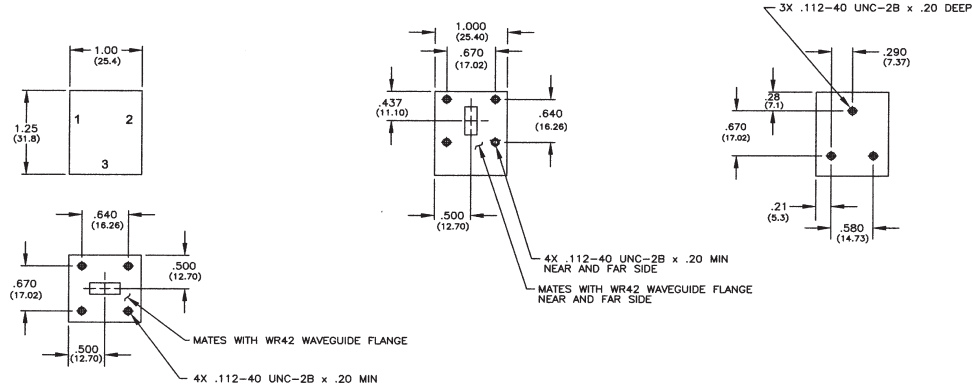
DATE

COMMENTS

INITIAL

Electrical Data

Frequency Range	18 - 26.5 GHz.
Insertion Loss	≤ 0.4 dB Max.
Isolation	18 dB min.
Power	5 W Average 1 KW Peak
VSWR	≤ 1.30

**RoHS Compliant**

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KWG177212

DESCRIPTION

Waveguide Circulator, WR42

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.